



SINCE 1994

INNOVATIVE SOLAR MOUNTING SOLUTION

NCNF PROVIDES

***a Safety, Quality, High Performing
Structure that Last***

01 Company Introduction

02 Solutions and Products

03 Typical Projects

04 NCNF Keyword



SINCE 1994

***Innovative
Solar Mounting
Solution***





SINCE 1994

01 Company Introduction

NANCHANG NANFEI FIRE EQUIPMENT MANUFACTURING CO.,LTD.
(hereinafter referred to as NCNF) –Innovative Solar Mounting Solution

NCNF is a leading high-tech enterprise established in 1994, registration capital USD10.8Million, a professional manufacturer and exporter specialized in R&D, production and sales of solar mounting system and anti-seismic system, our headquarter is located in Nanchang city, Jiangxi province, near Shanghai city.


The company is committed to advanced technology R&D and production with NCNF characteristics, manufacture and supply a variety of bracket systems suitable for installation in various complex environments, our products have been awarded lots of patents and ISO9001/ISO14001/ISO45001 certificates. With 6GW annual production capacity, it becomes one of the largest bracket suppliers in China. NCNF has always paid attention to product quality management. From the entry of raw materials to the processing, manufacturing, testing and delivery, we carry out strict inspections. High-quality products and efficient services are well received by national and international customers from more than 60 countries worldwide such as USA, UK, Australia, Argentina, Chile, Brazil, France, Hungary, Mexico, Malaysia, Vietnam, Philippines, Japan, Korea, Cambodia etc.,



Company History



In 1994, **NCNF** established with the registered capital USD10.8M, Annual revenue USD152M.

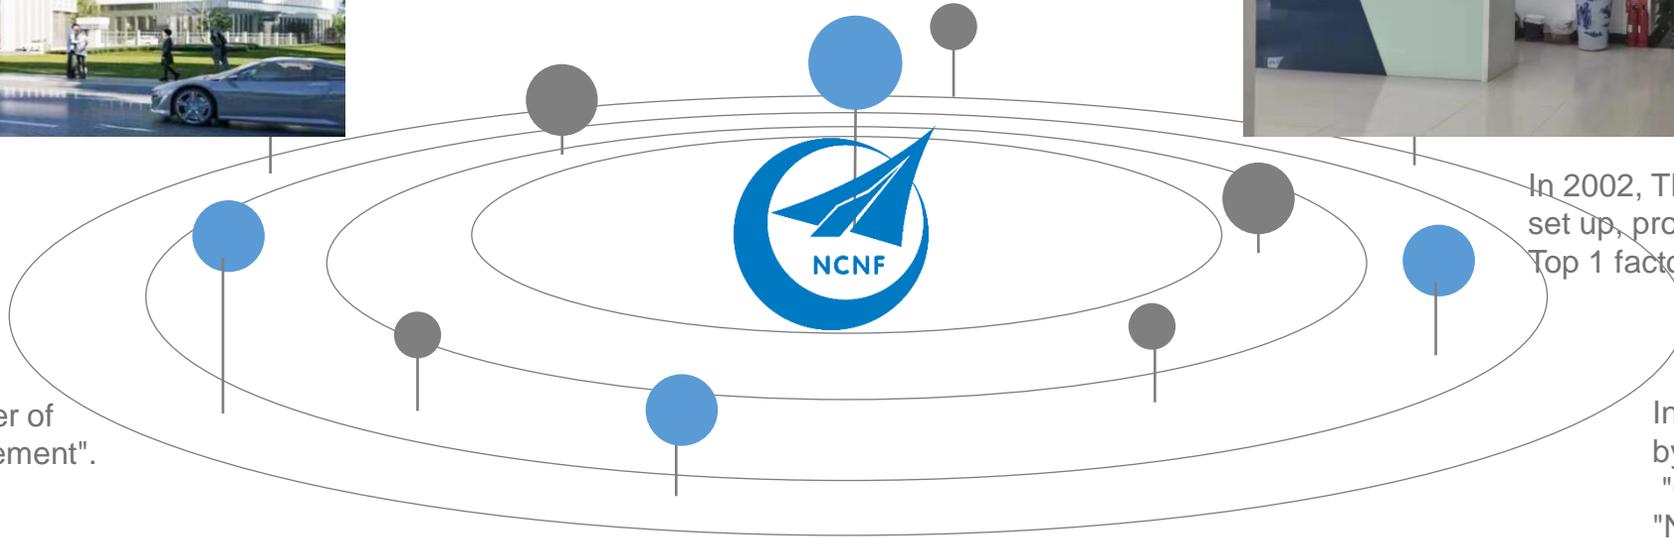

In 2021, Awarded of "Outstanding Supplier of Government Procurement".



In 2002, The subsidiary XINYUAN set up, production capacity 8 million M², Top 1 factory for fire doors in Nanchang.

In 2017, **NCNF** was accredited by the State as "China Famous Brand" & "National high-tech enterprise".

In 2019, Obtained lots of invention patents of Photovoltaic Brackets.



In 2018, Certificated by ISO9001, ISO45001, ISO14001.



Huazhong International
Quality Management

Nanchang Xinyuan
131616

Quality Management System Certification Certificate

No: 16420Q30231R0M

We hereby certify

Nanchang Nanfei Fire Equipment Manufacturing Co., Ltd.

(Unified social credit code: 913601002617864519)

Organization registered address: The first floor, 2# Workshop, C-27 Plot, 3rd Phase, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi, P.R. China

The actual business address: The first floor, 2# Workshop, C-27 Plot, 3rd Phase, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi, P.R. China

System is in conformity with
GB/T 19001-2016/ISO 9001:2015

Certified range is as follows:
Production of special grade fireproof rolling shutters, fireproof rolling shutters (specific products shall be subject to the fire product certification), production of seismic support and suspension, construction of fire protection facilities engineering

System is in conformity with
GBT 19001-2016/ISO 9001:2015 and GB/T 50430-2017

Certified range is as follows:
Professional contracting of fire-fighting facilities within the scope of qualification

Issuing date: 2020-04-24 Closing date: 2023-04-23

NOTE: The certification registration scope does not include those production/service scopes which fail to be covered by the relevant effective administrative permission and qualification permission regulated by the state. The certification registration should accept the supervision audit as a regular interval and the certificate shall continue to be effective upon qualification extension and verification.

Accreditation Status: Accredited by China National Accreditation Service for Conformity Assessment, Corporate Registration Number: CNAS C164-X

General manager:

General manager:

Version 2018

ISO 9001

CFL CERTIFICATION CENTER

CERTIFICATION OF ENVIRONMENTAL MANAGEMENT SYSTEM

Registration No: 06521E01121R1S

Nanchang Nanfei Fire Protection Equipment Manufacturing Co., Ltd.

Unified social credit code: 913601002617864519

Registered Address: Workshop 1F, Massif 2#, Phase III C-27, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi Province

Office Address: Workshop 1F, Massif 2#, Phase III C-27, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi Province

Production and Operation Address: Workshop 1F, Massif 2#, Phase III C-27, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi Province

Complies with the requirements of
GB/T24001-2016/ISO 14001:2015

The scope of certification business covers:
Construction of Fire Fighting Facilities Within the Scope of Qualification And Related Management Activities

the 1st qualified identification	the 2nd qualified identification	the 3rd qualified identification
----------------------------------	----------------------------------	----------------------------------

The certified organization should paste a new intendants tag within 12 months from the last site audit, otherwise the certificate will be invalid.

The validity period: 2021-09-22 to 2024-09-21 The issued date: 2021-09-22

Version 2018

No: 1833446

ISO 14001

CFL CERTIFICATION CENTER

CERTIFICATION OF OCCUPATION HEALTH AND SAFETY MANAGEMENT SYSTEM

Registration No: 06521S01097R1S

Nanchang Nanfei Fire Protection Equipment Manufacturing Co., Ltd.

Unified social credit code: 913601002617864519

Registered Address: Workshop 1F, Massif 2#, Phase III C-27, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi Province

Office Address: Workshop 1F, Massif 2#, Phase III C-27, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi Province

Production and Operation Address: Workshop 1F, Massif 2#, Phase III C-27, Nanchang Changdong Industrial Zone, Qingshanhu District, Nanchang City, Jiangxi Province

Complies with the requirements of
GB/T45001-2020/ISO 45001:2018

The scope of certification business covers:
Construction of Fire Fighting Facilities Within the Scope of Qualification And Related Management Activities

the 1st qualified identification	the 2nd qualified identification	the 3rd qualified identification
----------------------------------	----------------------------------	----------------------------------

The certified organization should paste a new intendants tag within 12 months from the last site audit, otherwise the certificate will be invalid.

The validity period: 2021-09-22 to 2024-09-21 The issued date: 2021-09-22

Version 2018

No: 1806208

ISO 45001

Verified

Gold Plus Supplier Assessment Certificate

Certification No.: 22927153_P+T

Nanchang Xinyuan Fire Equipment Engineering Co., Ltd.

南昌鑫源消防设备工程有限公司

<http://ncxyf.en.alibaba.com>

Onsite assessment was conducted by SGS

Valid: 30 Dec., 2021 to 29 Dec., 2022

Issued by: Assessed by:

Signature:

Title: Director of SGS eCommerce, Government & Institution Services, SGS CHN

SGS


150,000 m² land area of factories




Factories



SINCE 1994

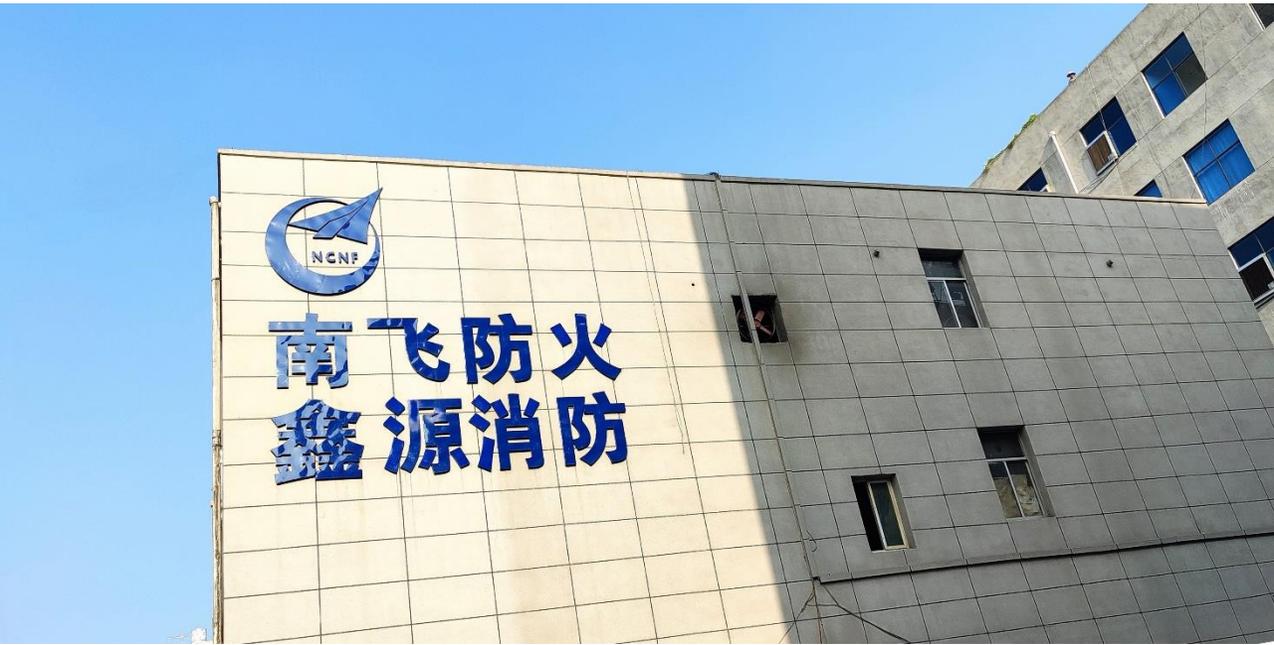

Education Level

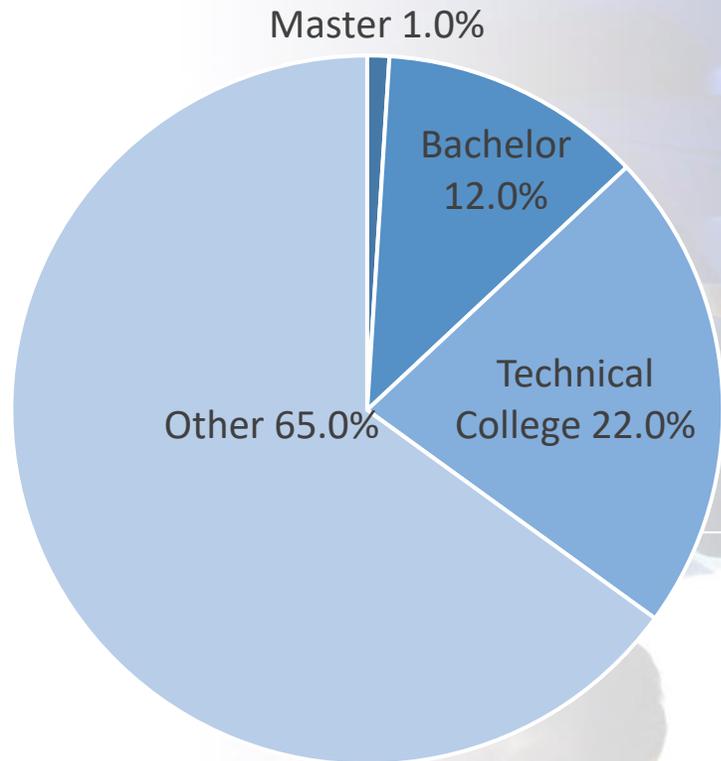

Up to May 20th, 2022
there are 1,028 staff



SINCE 1994


02 Solutions and Products

科技引领未来
创新驱动发展



1


Solar Mounting solutions




Color Steel Tile



Porcelain Tile



Angle Structure

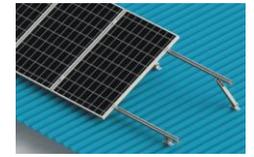


Adjustable rear leg




Solar Carport



Classic C Steel



Classic Aluminum



Solar Ground




Solar Waterproof

2

Products: Parts & Accessories **SUPPORT** Customization



C Steel Rail

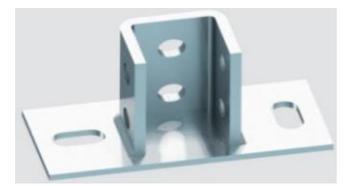


Hot Galvanized Steel Parts




Roof Hook Series



Beam & Leg




Alu Rail Series




Water Channel



End Clamp



Mid Clamp




Foot and Pallet



Beam/Rail Joiner



L foot & Rail Clamp



Slider Nut




Clip

NCNF

Building a distinguished enterprise,
Making a better solar foundation.

Solar Mounting Solution

Color Steel Tile Roof

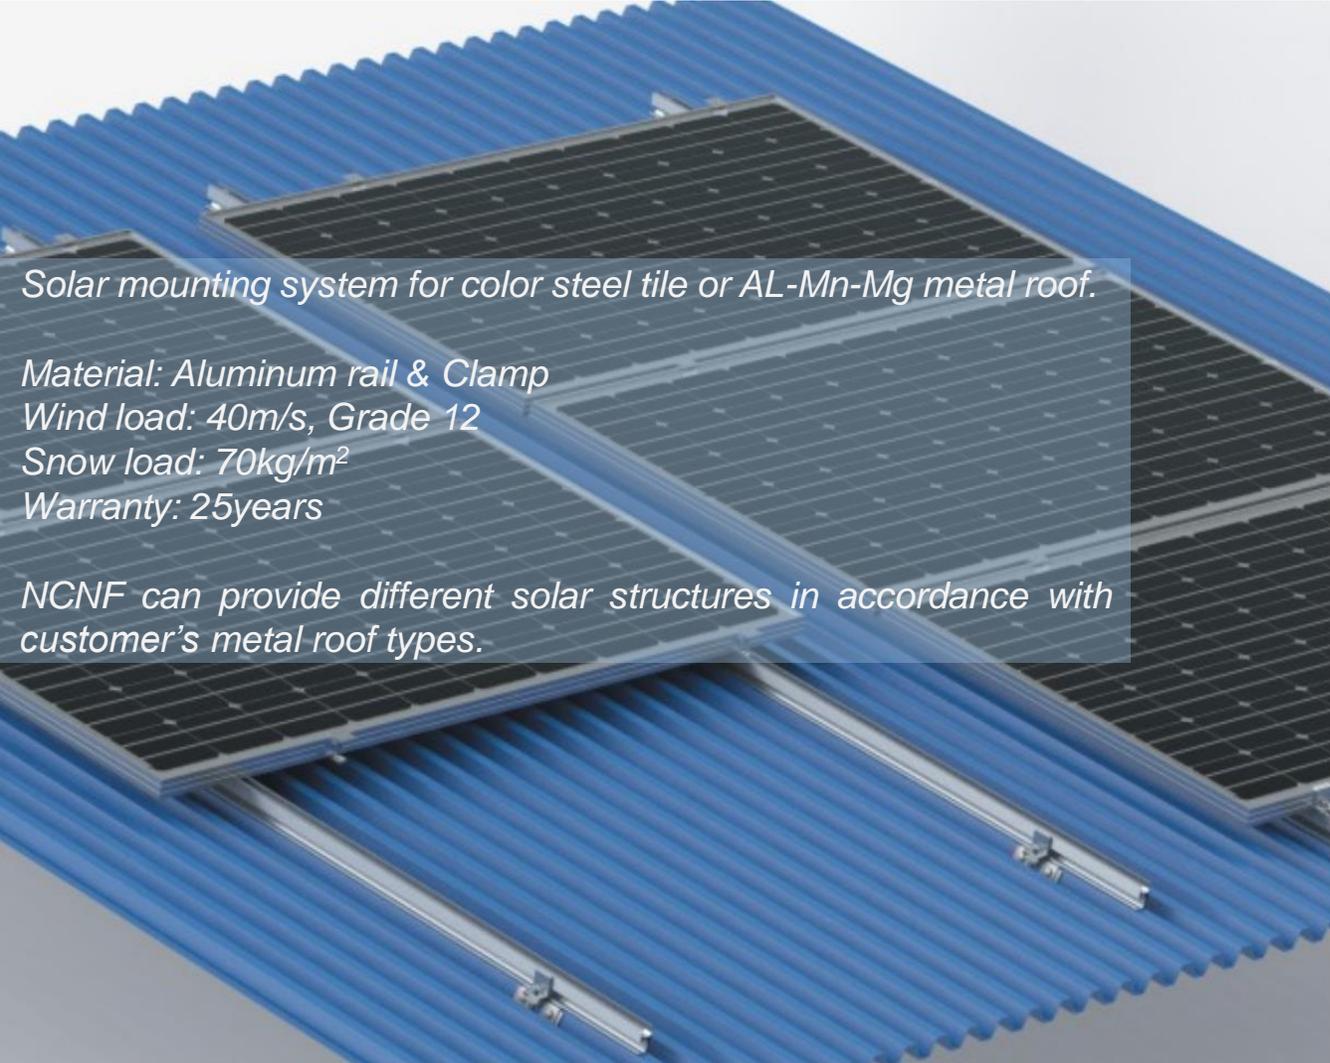

Solar mounting system for color steel tile or AL-Mn-Mg metal roof.

*Material: Aluminum rail & Clamp
Wind load: 40m/s, Grade 12
Snow load: 70kg/m²
Warranty: 25years*

NCNF can provide different solar structures in accordance with customer's metal roof types.




Stainless Steel Clamp




Double armed bolt & L feet



T Shape Aluminum Clamp

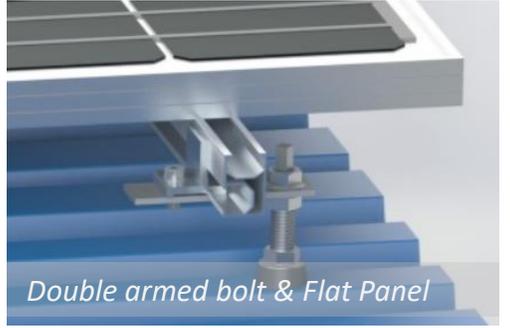

Double armed bolt & Flat Panel

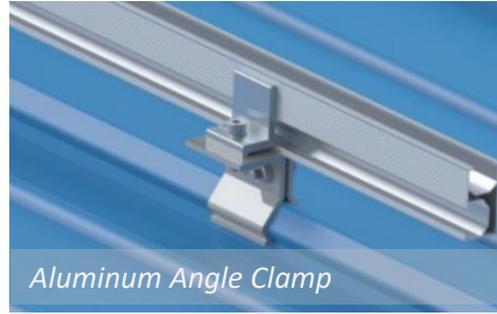

Aluminum Angle Clamp



Double armed bolt & L feet

Solar Mounting Solution

Porcelain Tile Roof



Solar mounting system for porcelain tile roof.


Material: Aluminum rail & SUS304 hook

Wind load: 40m/s, Grade 12

Snow load: 70kg/m²

Warranty: 25years

NCNF can provide different solar structures in accordance with customer's requirements.

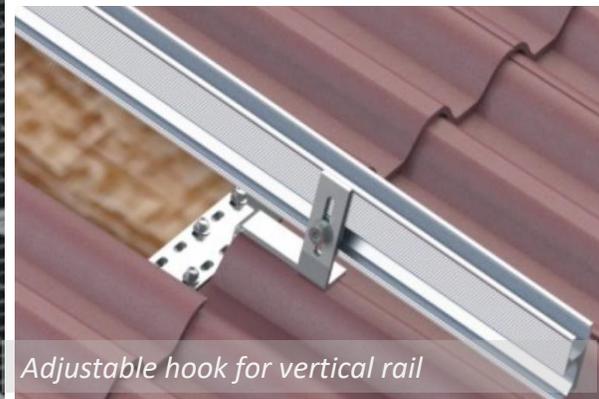

Adjustable hook for vertical rail



Adjustable hook for horizontal rail








Hook for wooden beam



Hook for C steel rail

Solar Mounting Solution

Angle structure dual function(adjustable 20° or 25°)

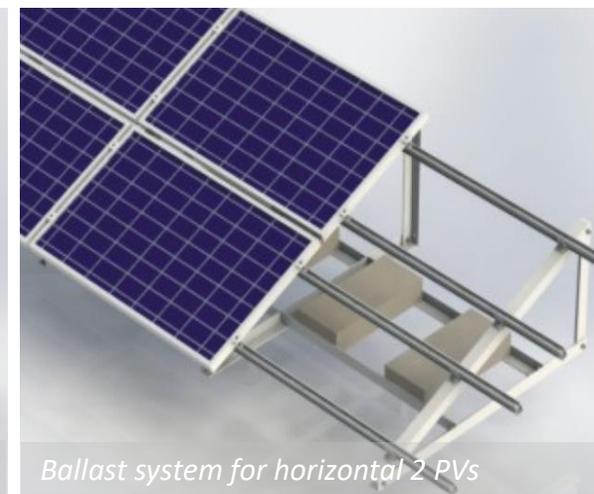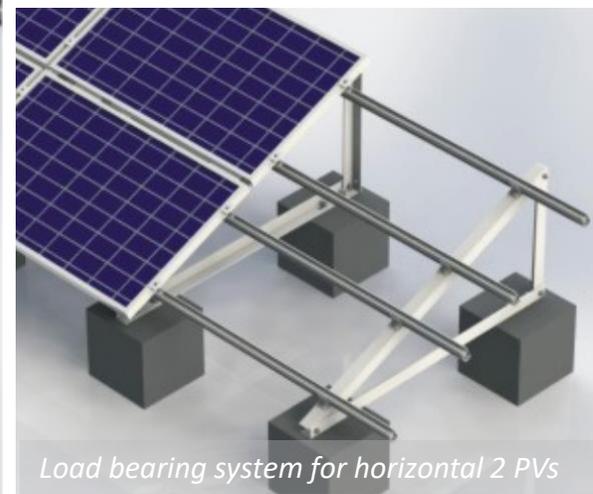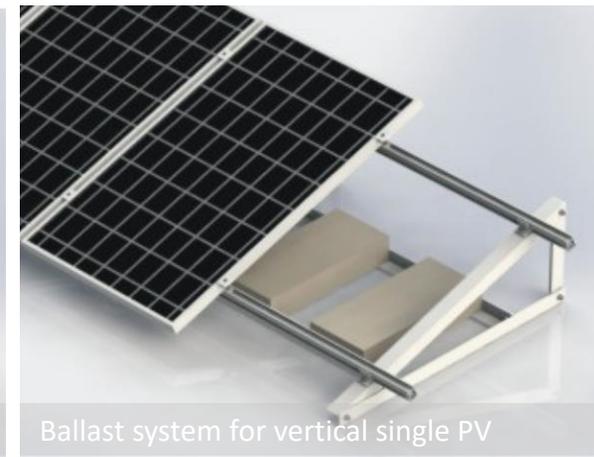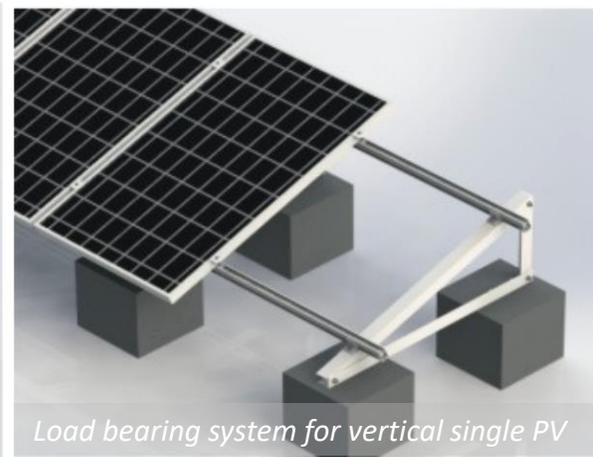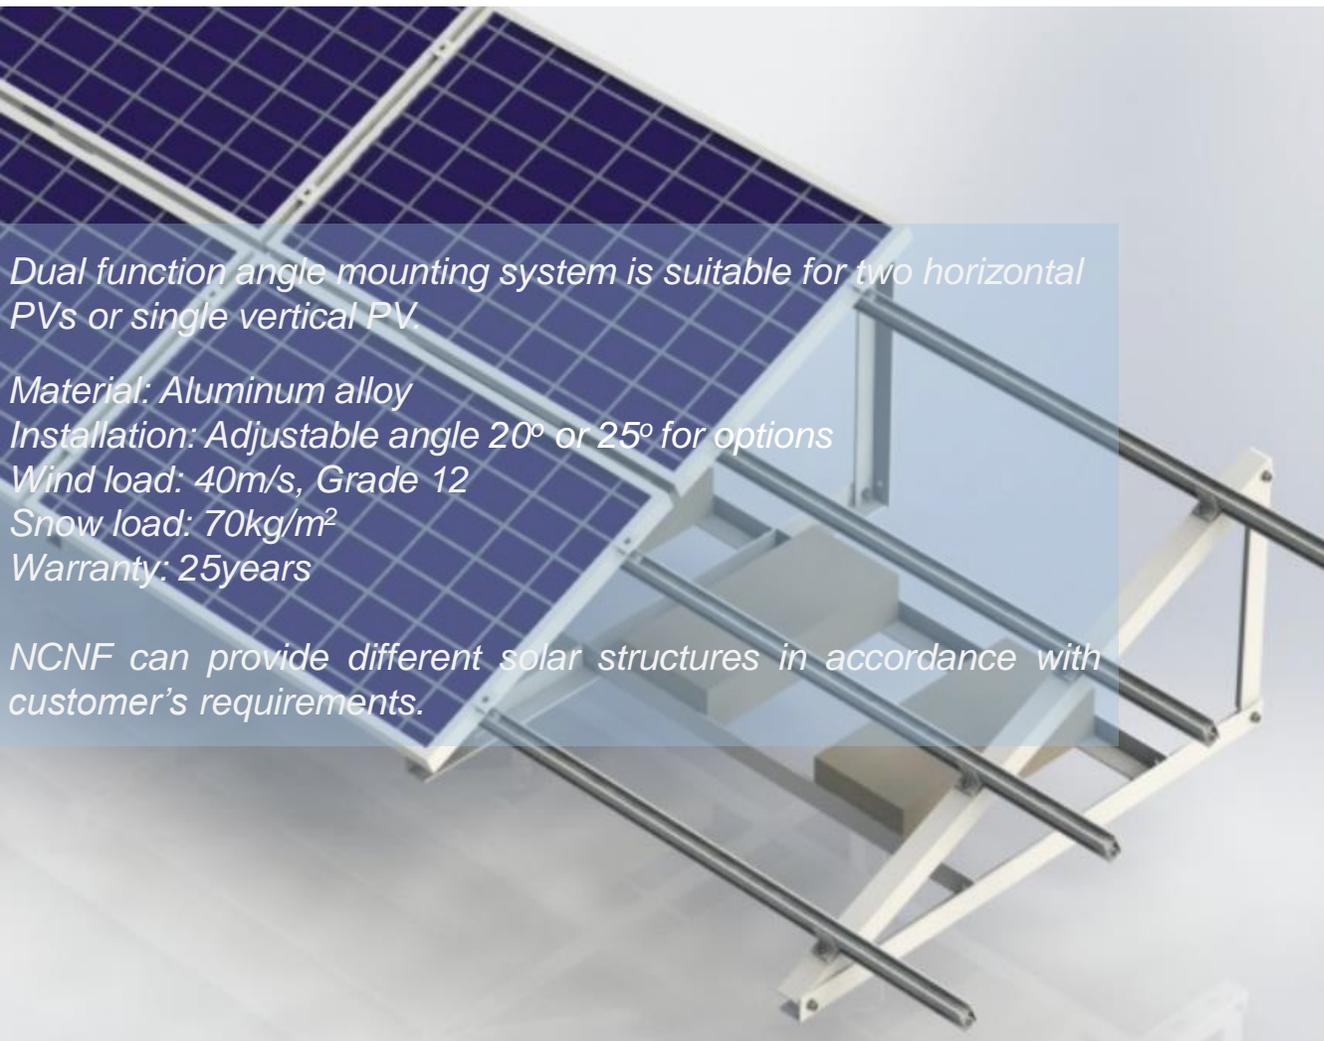

Solar Mounting Solution

Adjustable Rear Leg



Adjustable rear leg mounting system install easily cost-effective.
Material: Aluminum alloy
Installation: Adjustable angle from 10° to 35°
Wind load: 40m/s, Grade 12
Snow load: 70kg/m²
Warranty: 25years


NCNF can provide different solar structures in accordance with customer's requirements.



Also can be used for concrete foundation



Side View

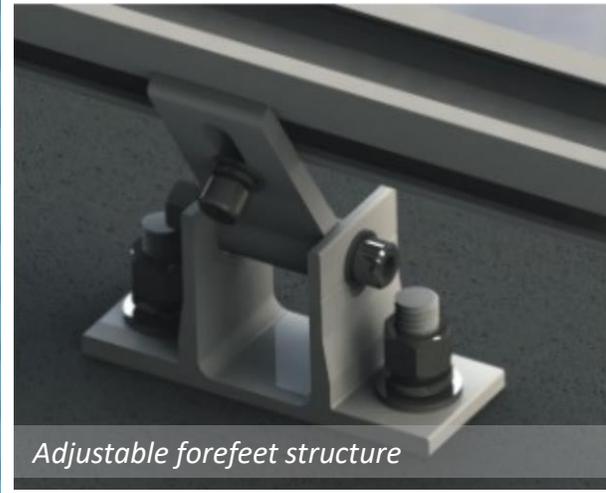




Adjustable forefeet structure



Adjustable rear leg


Solar Mounting Solution

Classic C steel

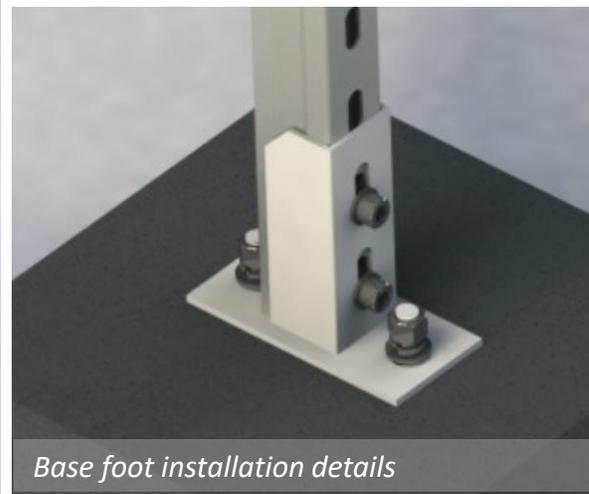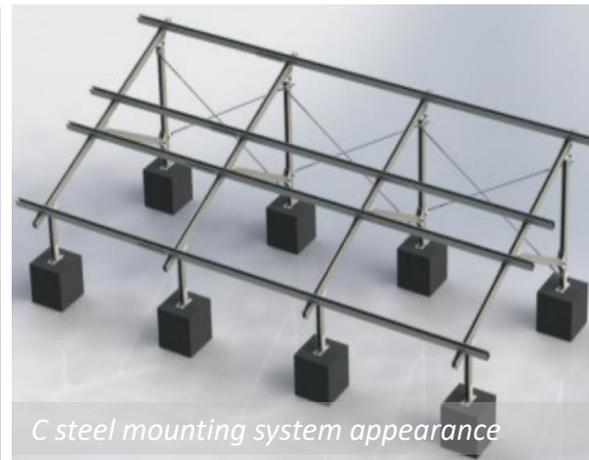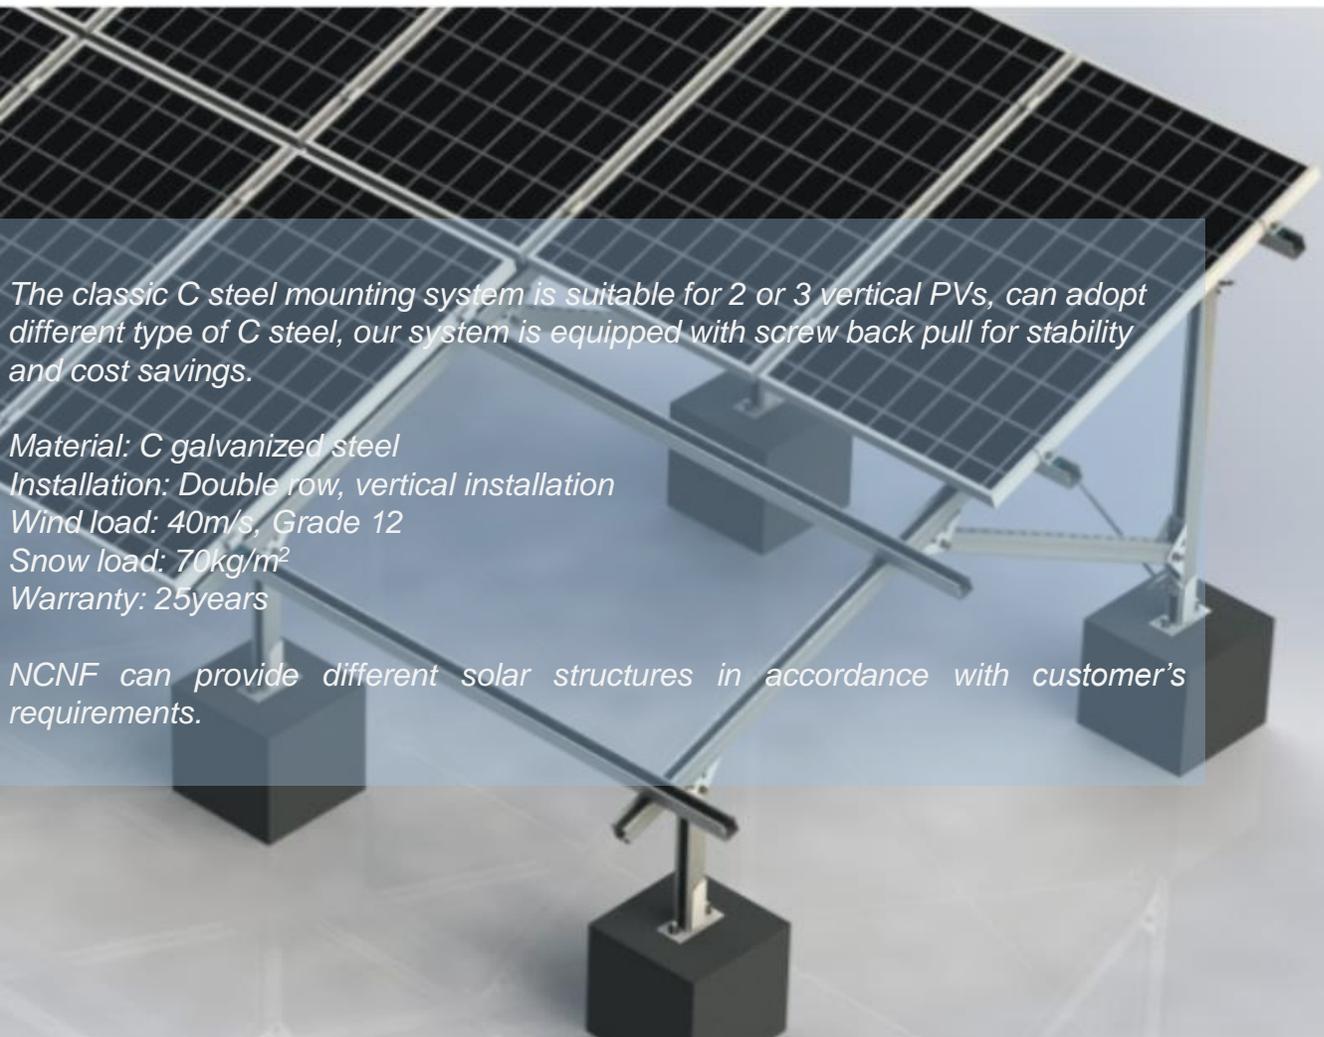

Solar Mounting Solution

Classic Aluminum

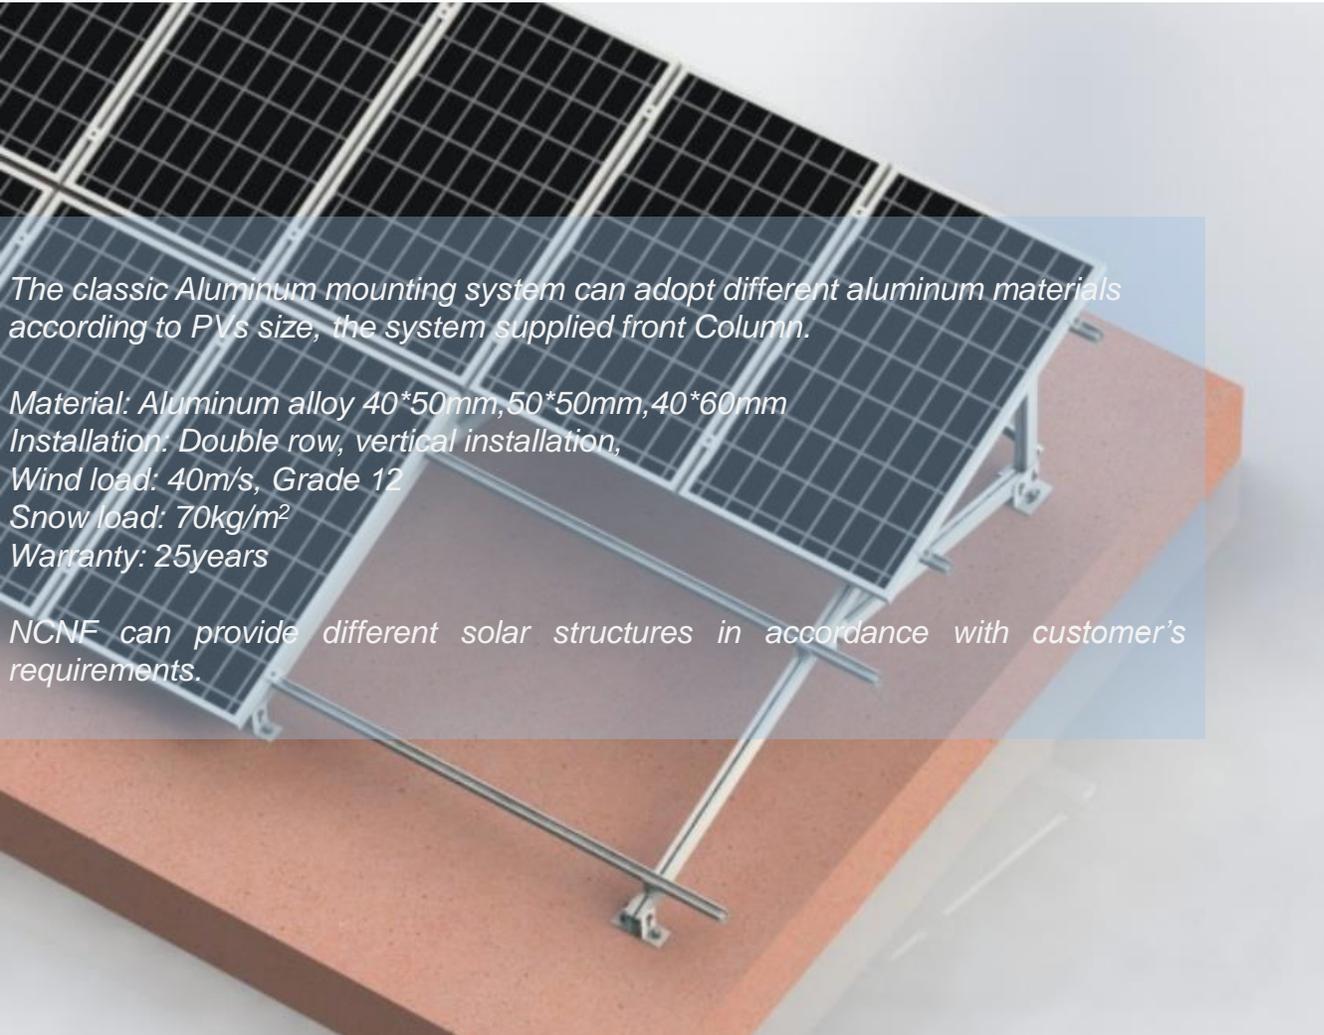

The classic Aluminum mounting system can adopt different aluminum materials according to PVs size, the system supplied front Column.

*Material: Aluminum alloy 40*50mm,50*50mm,40*60mm*

Installation: Double row, vertical installation,

Wind load: 40m/s, Grade 12


Snow load: 70kg/m²

Warranty: 25years

NCNF can provide different solar structures in accordance with customer's requirements.



Side View

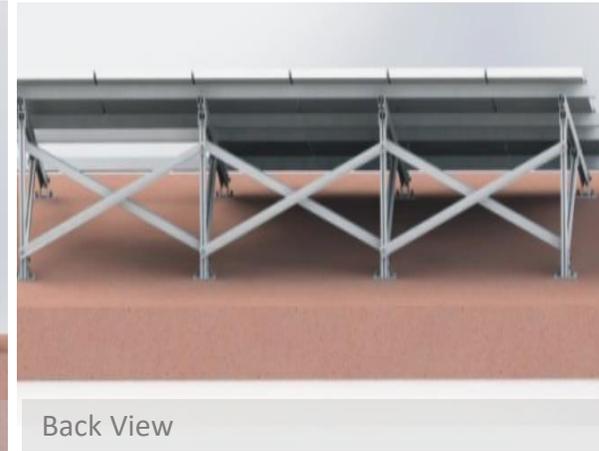

Back View




Details



Installation details

Solar Mounting Solution

Solar Ground

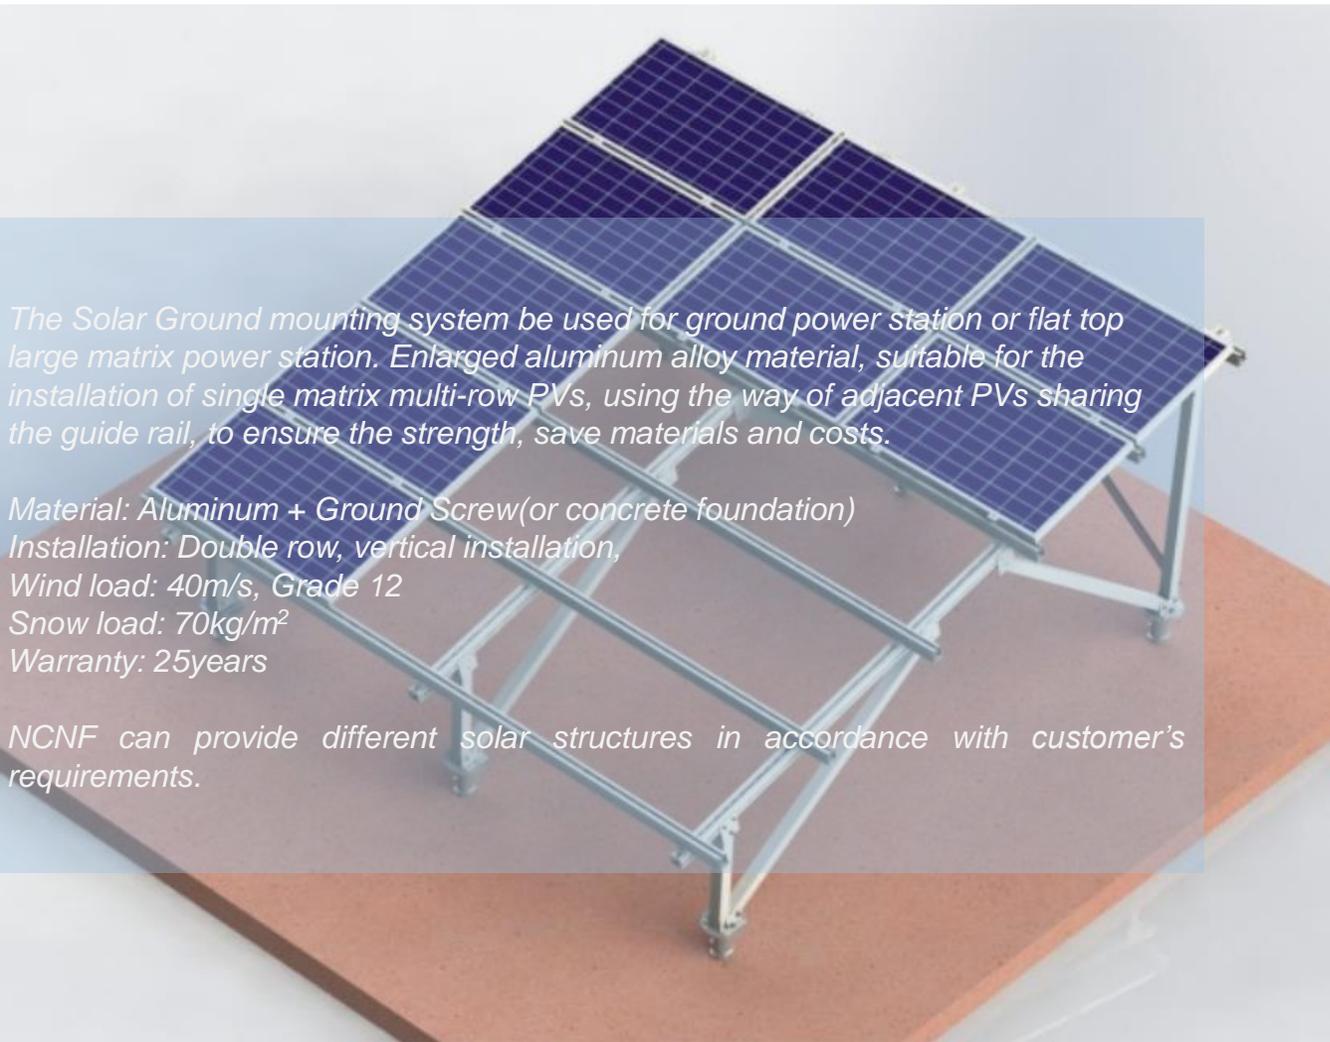

The Solar Ground mounting system be used for ground power station or flat top large matrix power station. Enlarged aluminum alloy material, suitable for the installation of single matrix multi-row PVs, using the way of adjacent PVs sharing the guide rail, to ensure the strength, save materials and costs.

*Material: Aluminum + Ground Screw(or concrete foundation)
Installation: Double row, vertical installation,
Wind load: 40m/s, Grade 12
Snow load: 70kg/m²
Warranty: 25years*


NCNF can provide different solar structures in accordance with customer's requirements.



Side View



Steel Ground Screw

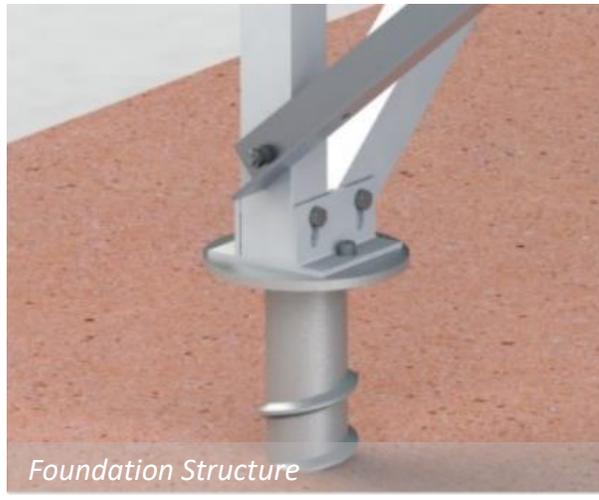


Foundation Structure



Installation details


Solar Mounting Solution

Solar Waterproof

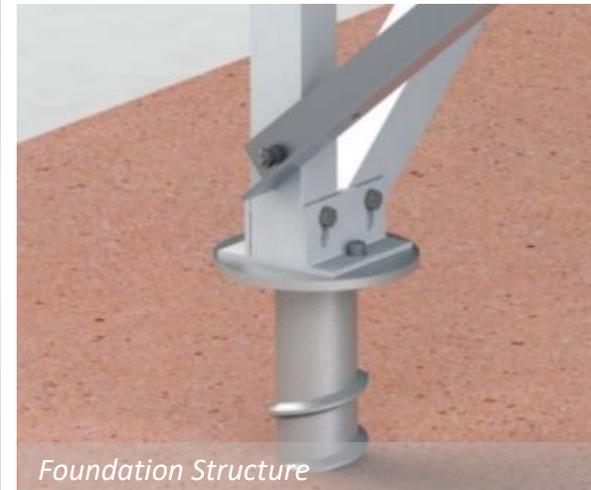

Solar Mounting Solution

Solar Carport

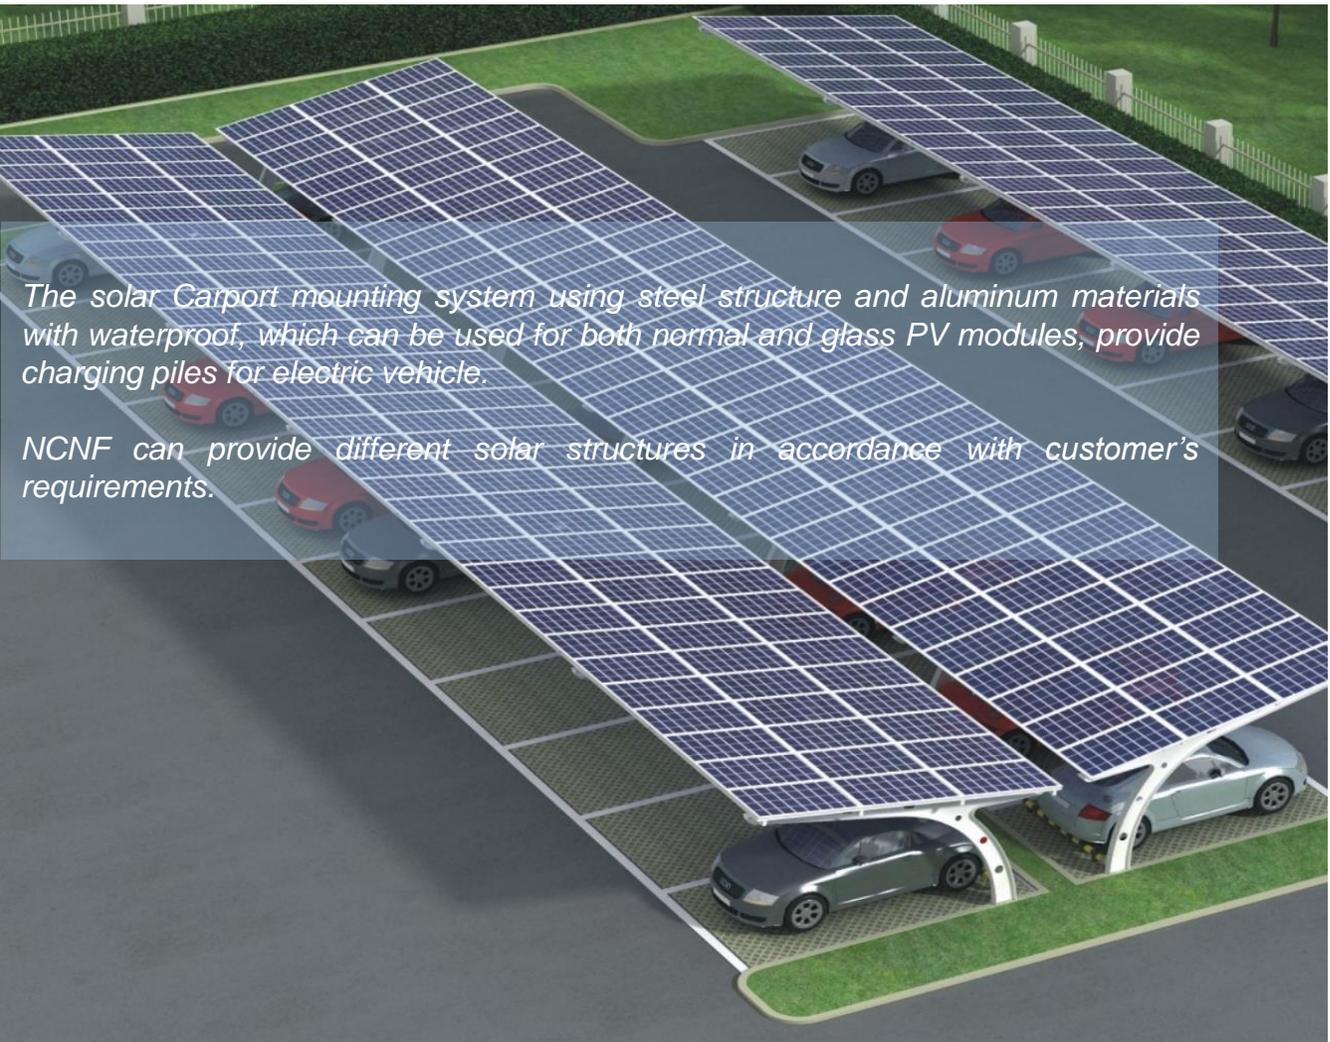

The solar Carport mounting system using steel structure and aluminum materials with waterproof, which can be used for both normal and glass PV modules, provide charging piles for electric vehicle.


NCNF can provide different solar structures in accordance with customer's requirements.



Electric motor bike port





Carport

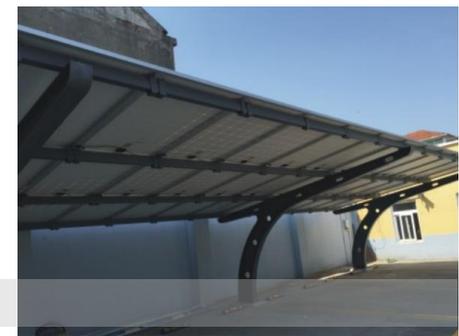




Products: Parts & Accessories

C Steel Rail Series




NF- 41*41mm

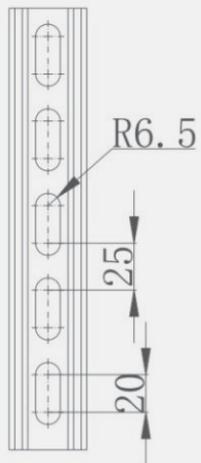

NF- 41*52mm

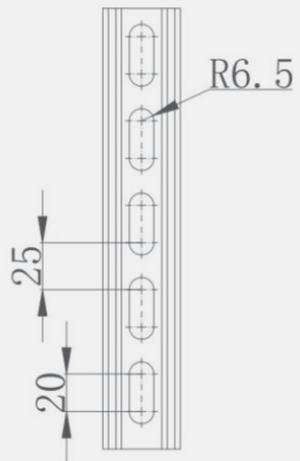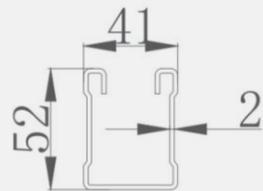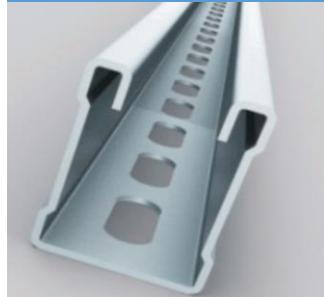

NF- 41*62mm

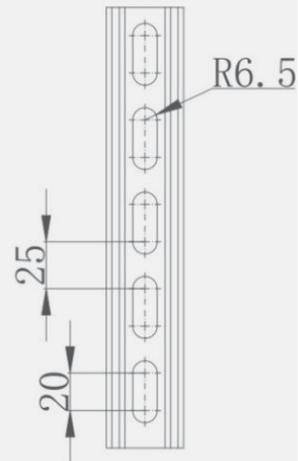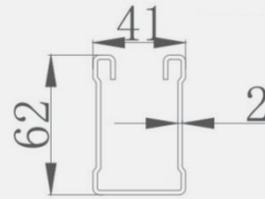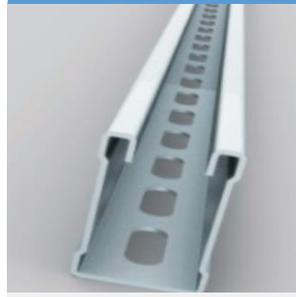

C/U type Steel

Material: Q235B

Surface treatment: Hot Galvanized

Products: Parts & Accessories

Hot Galvanized Steel Parts Series

C/U type Steel, Material: Q235B Surface treatment: Hot Galvanized

NF- DZ01





















NF- DZ02

NF- SJJ03

NF- SJJ04

NF- ZJ05








NF- ZJ06

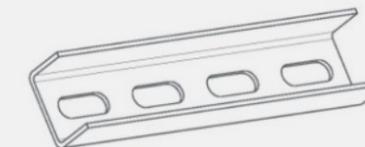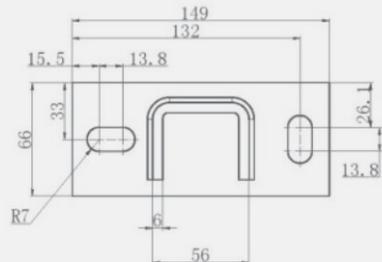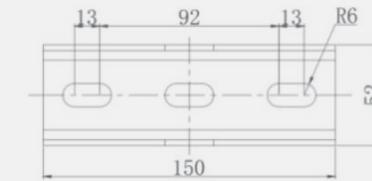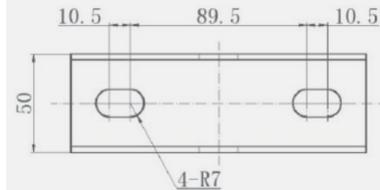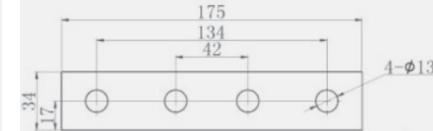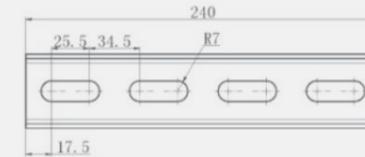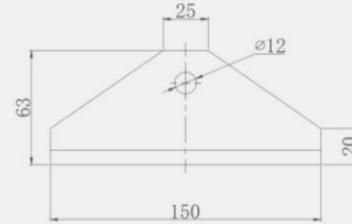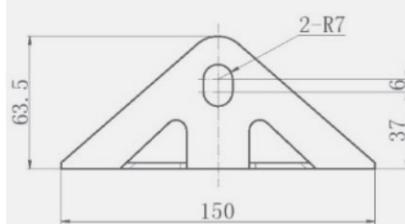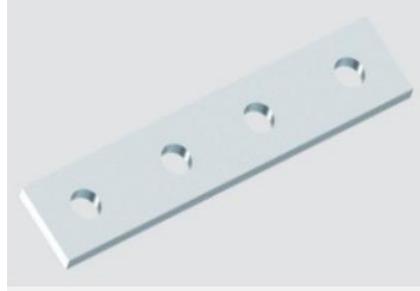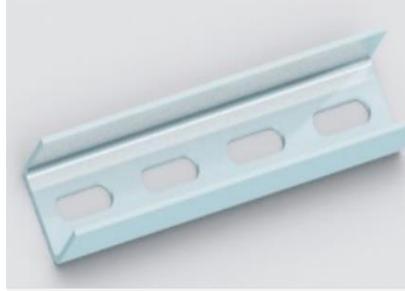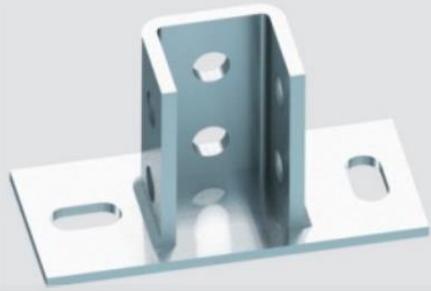

Products: Parts & Accessories

Hot Galvanized Steel Parts


C/U type Steel, Material: Q235B Surface treatment: Hot Galvanized

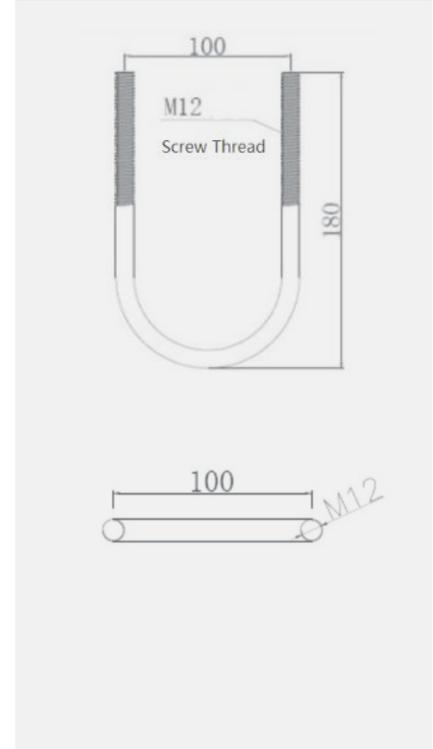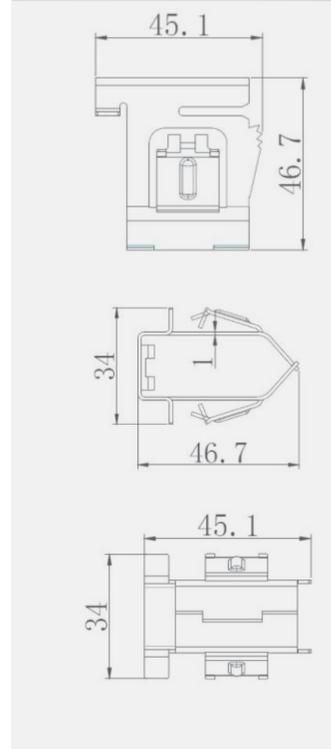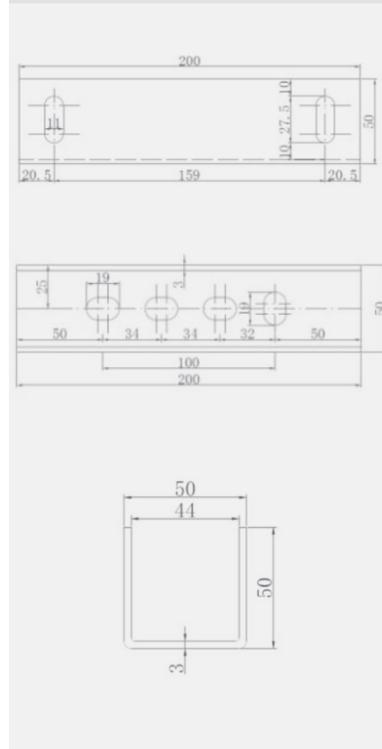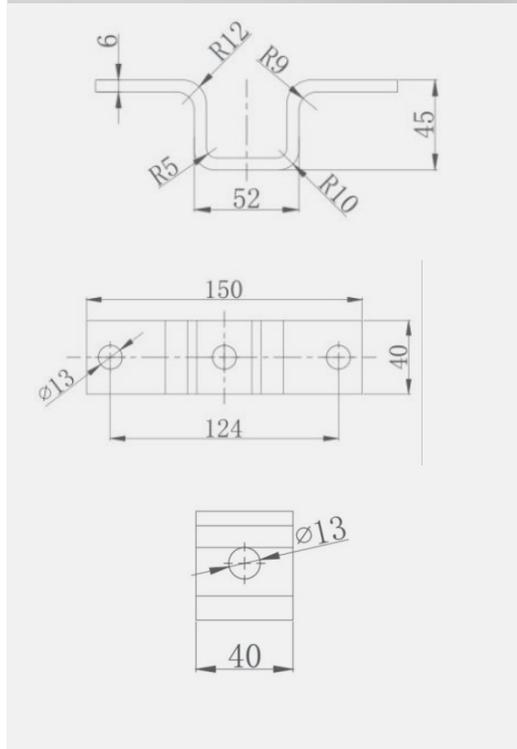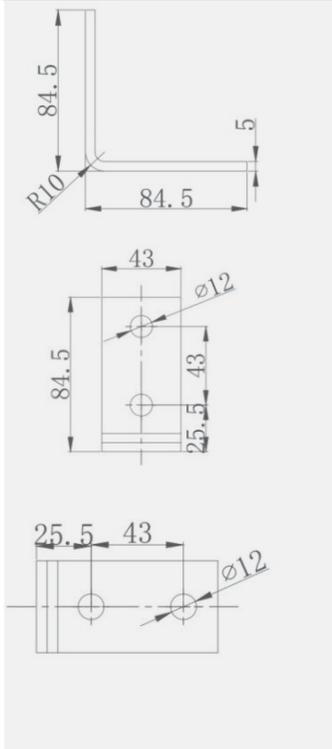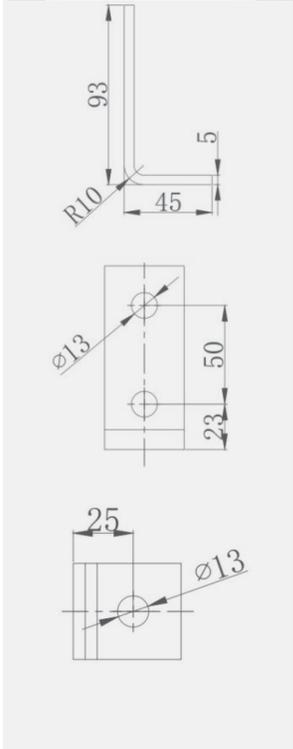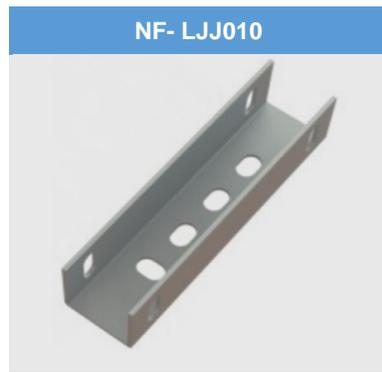


Products: Parts & Accessories

Roof Hook series


NF- HK01 (Adjustable Direct Hook)

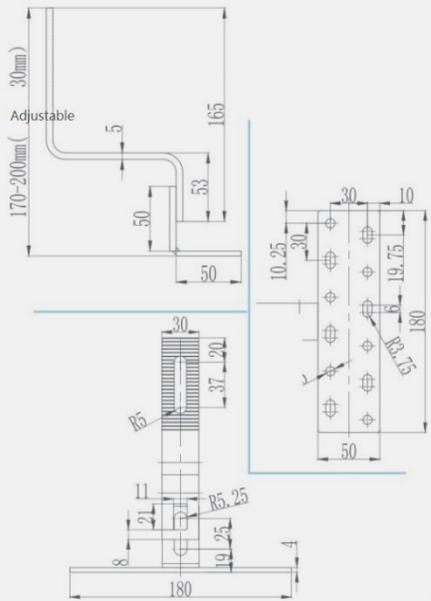


NF- HK02 (Adjustable Side Hook)

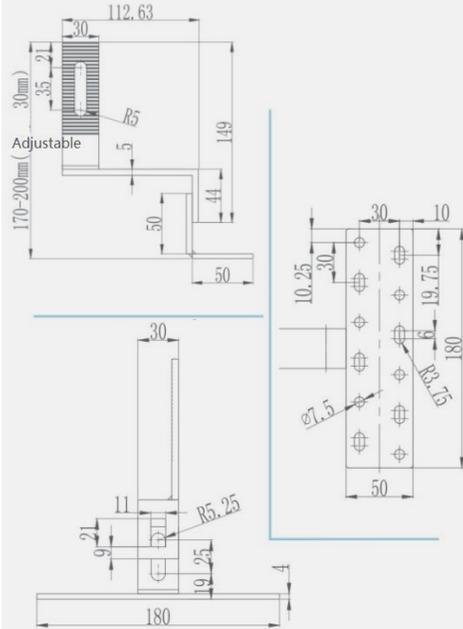


NF- HK03 (Fixed Direct Hook)

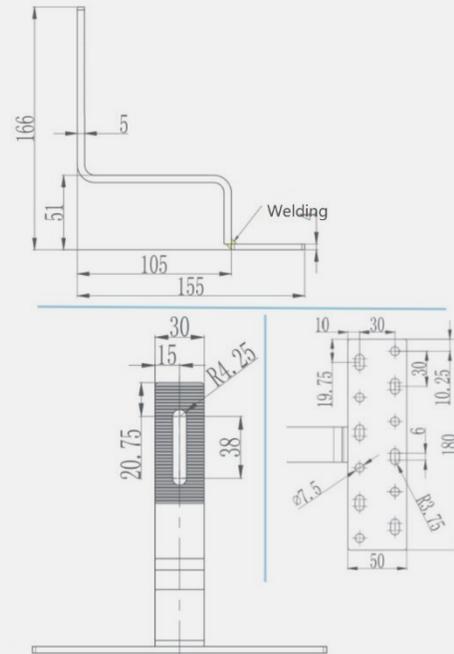

NF- HK04 (Fixed Side Hook)










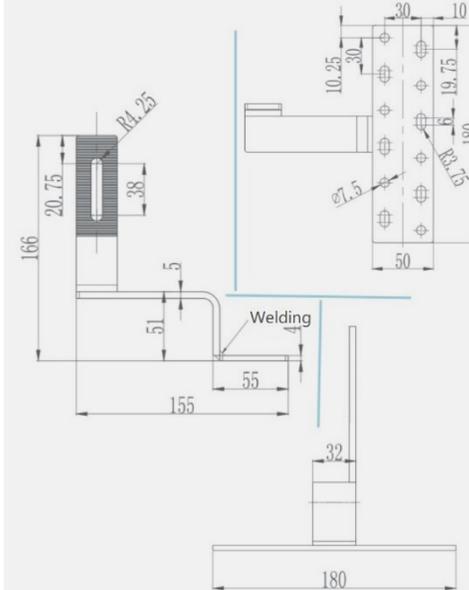


NF- HK05 (Fixed Flat Hook)

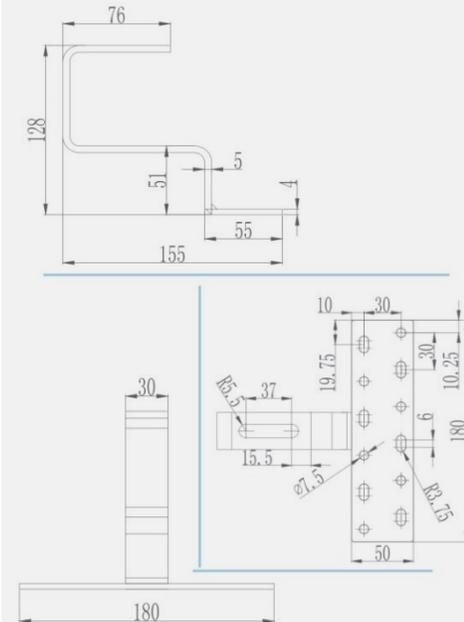

Products: Parts & Accessories

Beam & Leg Series

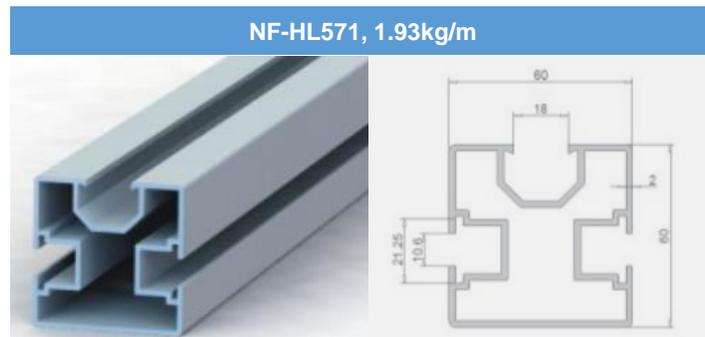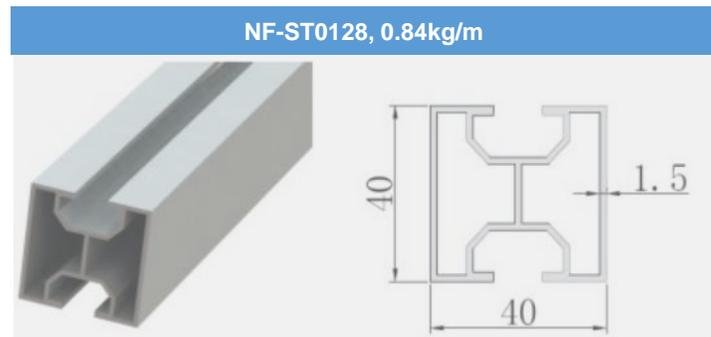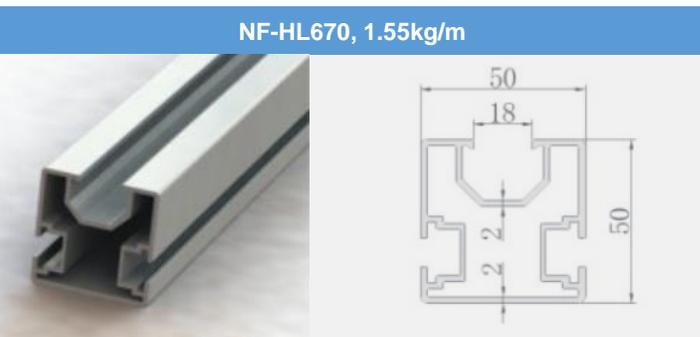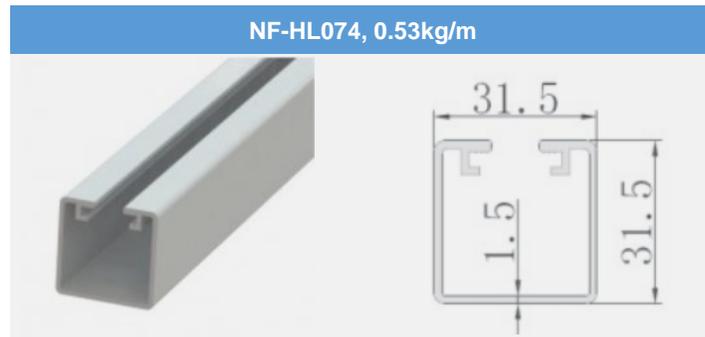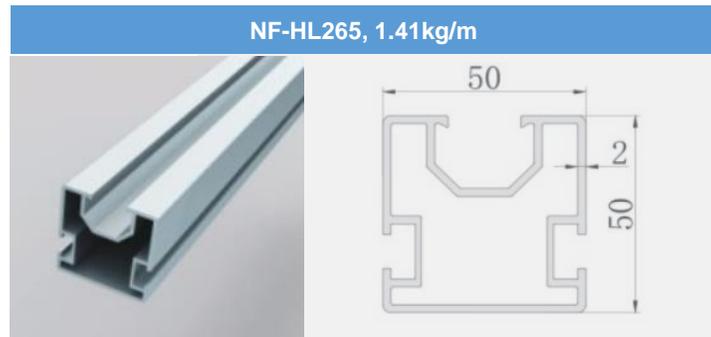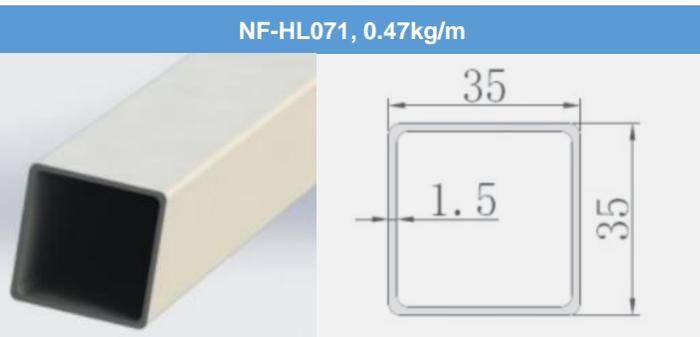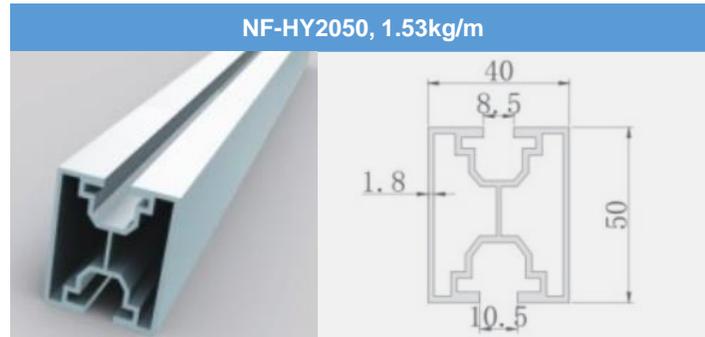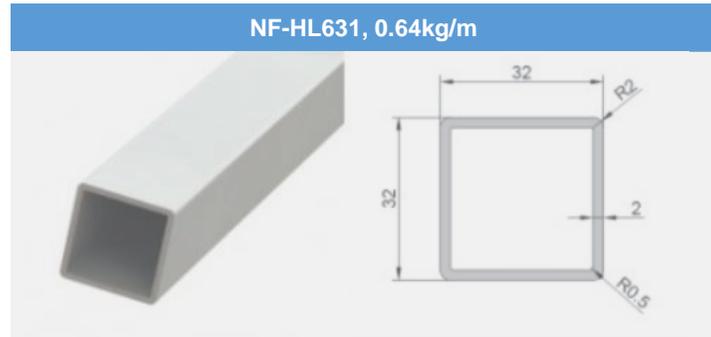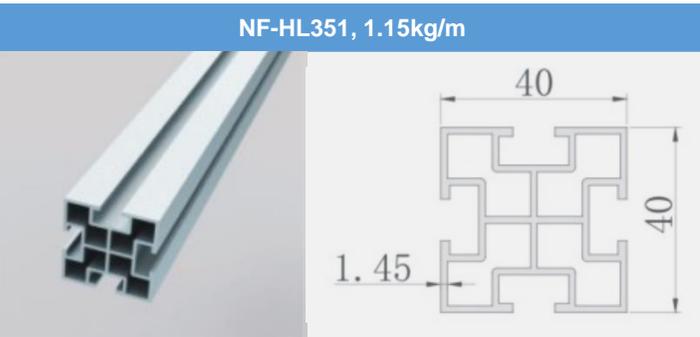


Products: Parts & Accessories

Beam & Leg Series


NF-HY5050, 2.08kg/m




NF-HY1873, 2.37kg/m

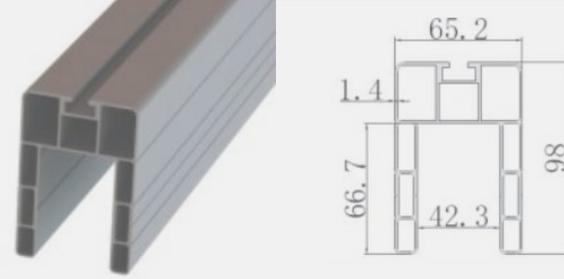


NF-HL572, 1.66kg/m

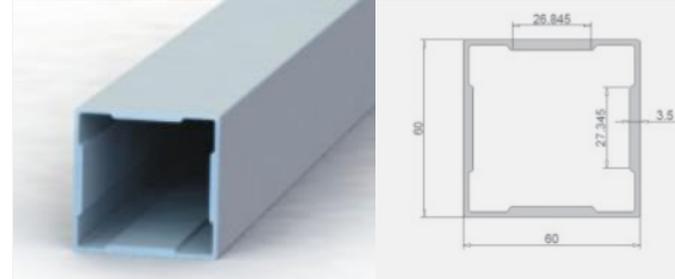


NF-ZJ134, 0.85kg/m





NF-HL745, 1.42kg/m

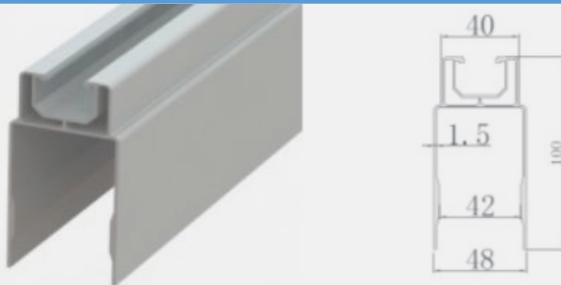


NF-ZJ266, 0.84kg/m

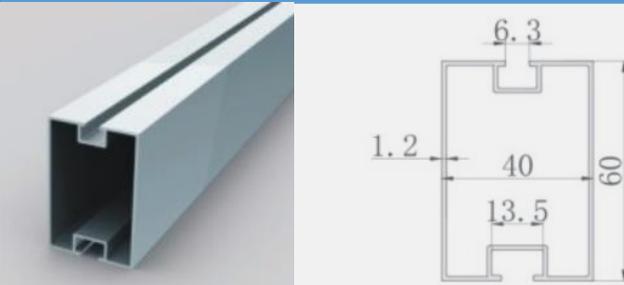

NF-HL510, 1.16kg/m

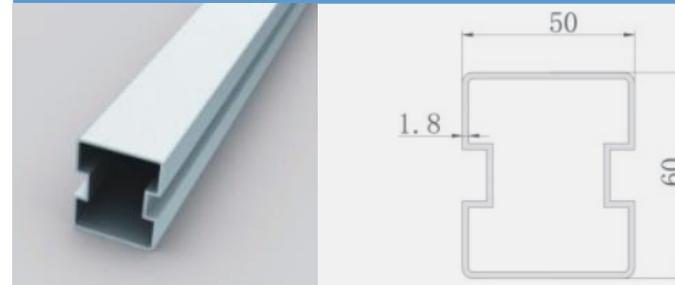


NF-HY1868, 1.57kg/m

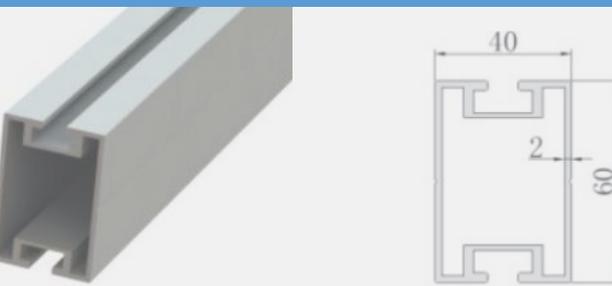

NF-HL113, 0.6kg/m













NF-HL4080, 1.86kg/m

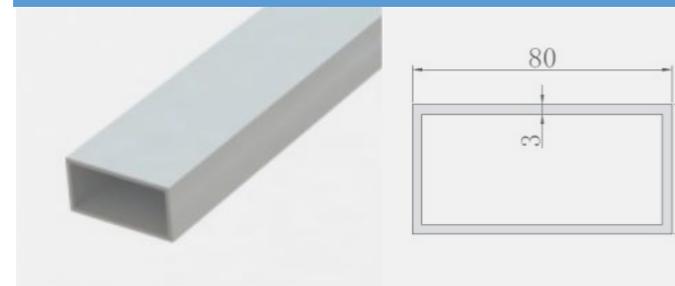

Products: Parts & Accessories


Aluminum Rail Series

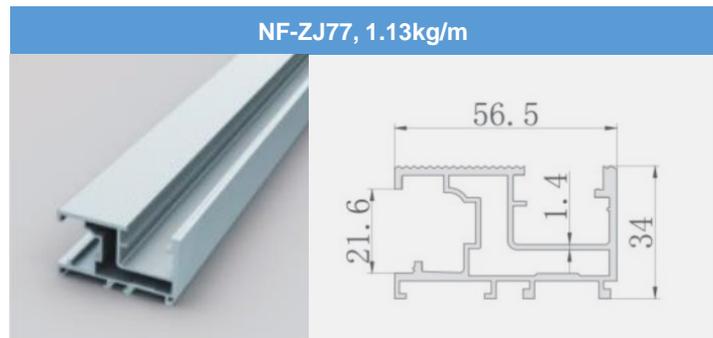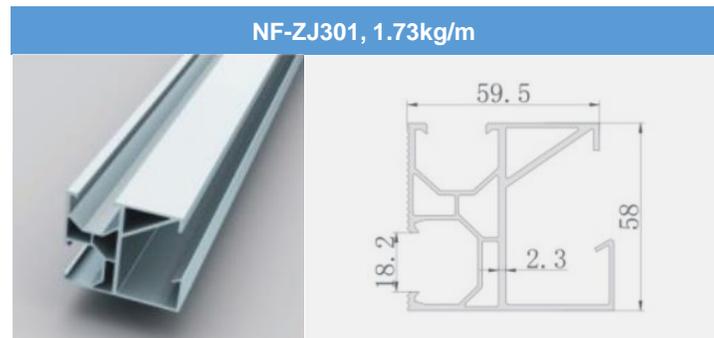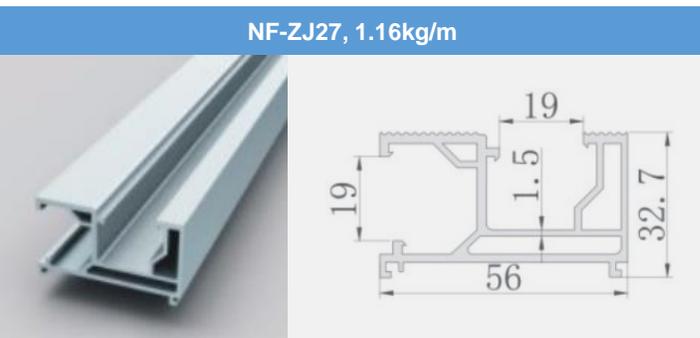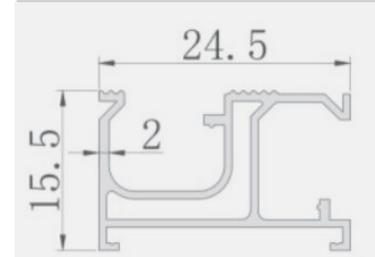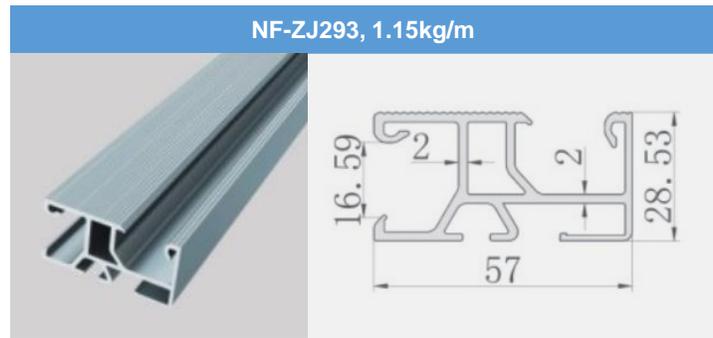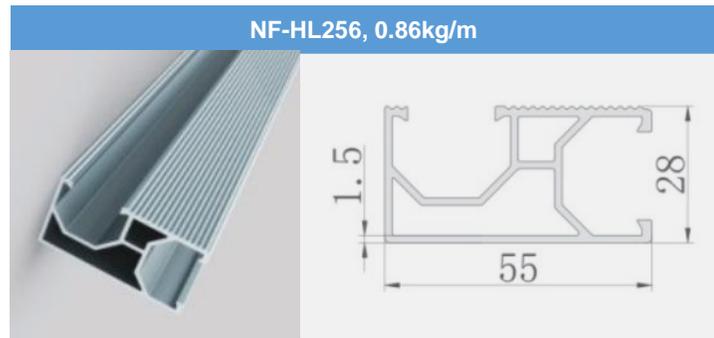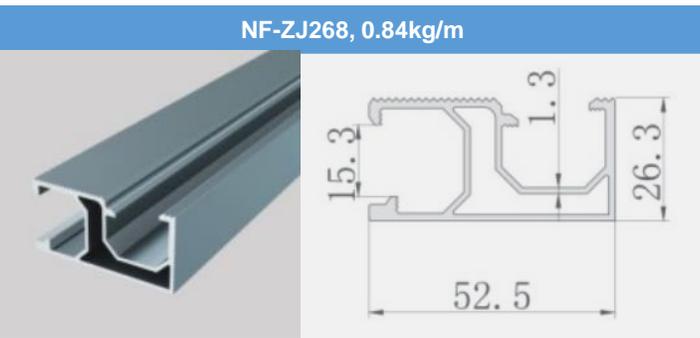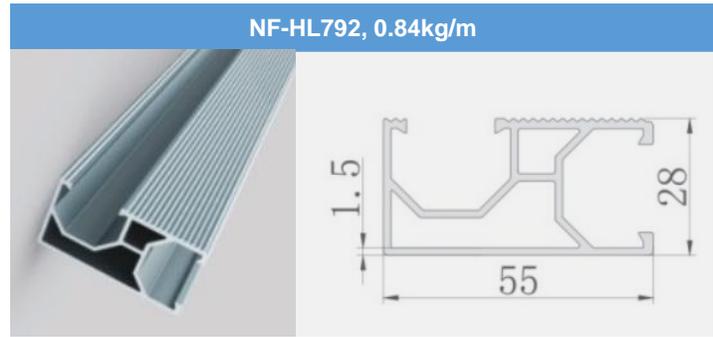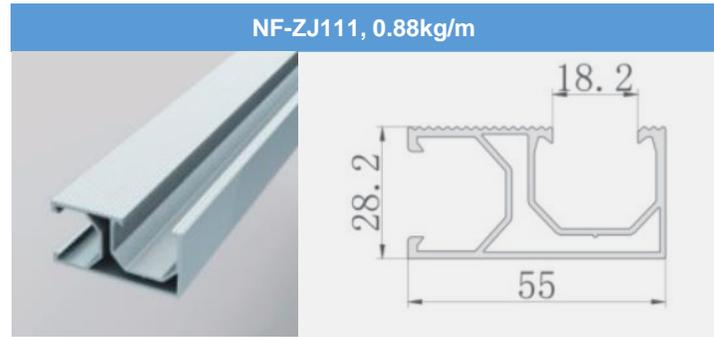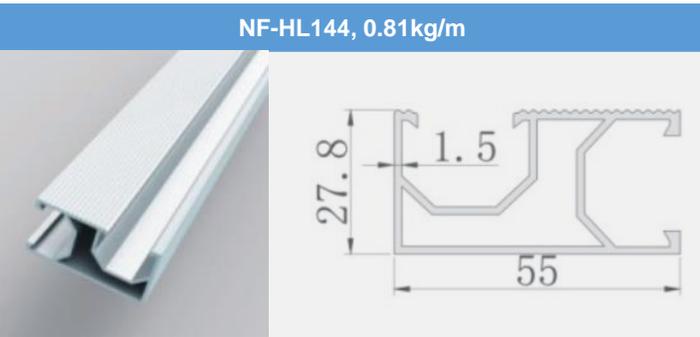


Products: Parts & Accessories

Aluminum Rail Series

NF-HL075, 0.88kg/m

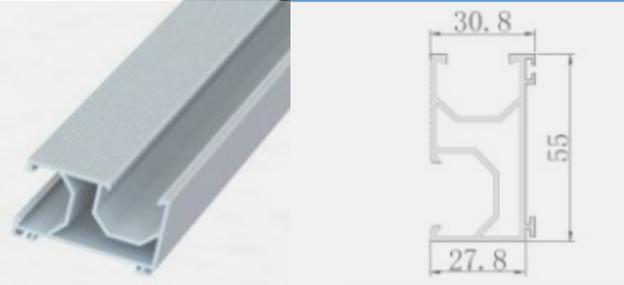

NF-HL746, 1.06kg/m

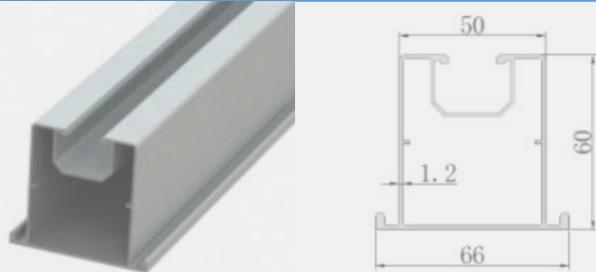

NF-HL768, 0.75kg/m




NF-ZJ46, 0.77kg/m





NF-HL573, 1.33kg/m




NF-HL201, 0.75kg/m

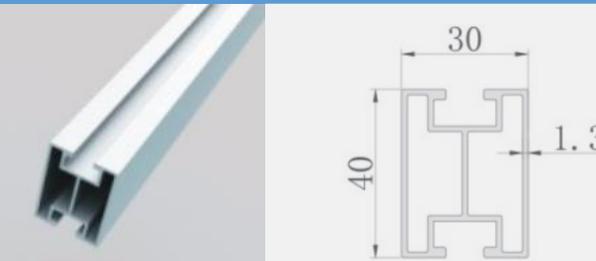


NF-HL511, 1.06kg/m

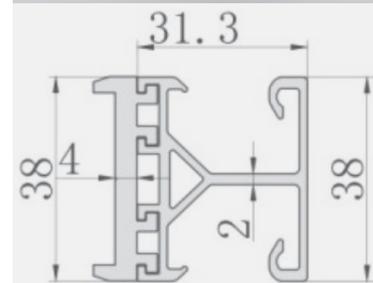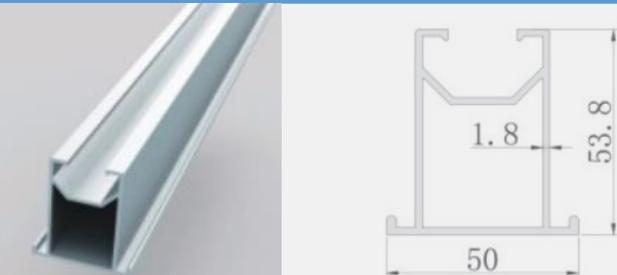

NF-HL232, 0.81kg/m

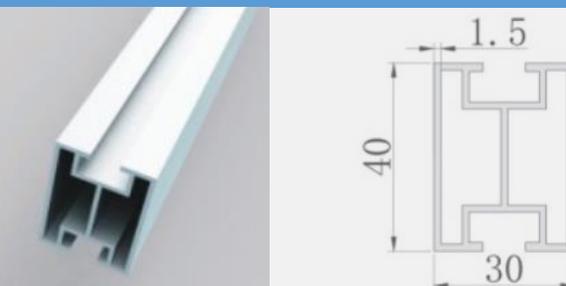

NF-HL6060, 2.66kg/m

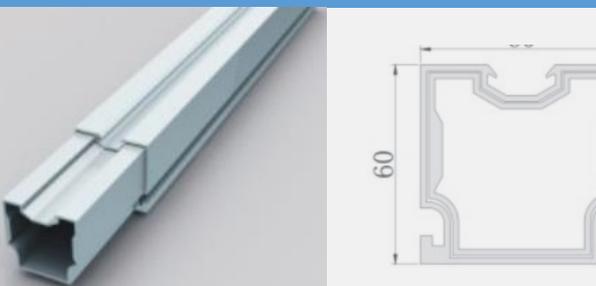


NF-HL406, 0.8kg/m




Products: Parts & Accessories

Aluminum Rail Series


NF-HL772, 0.7kg/m

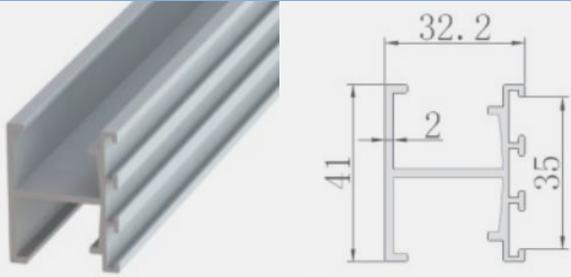

NF-HL615, 0.72kg/m

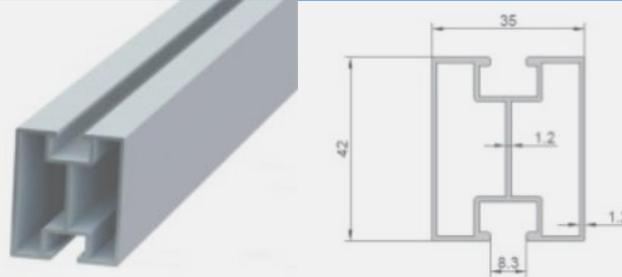


NF-HY2221, 0.72kg/m

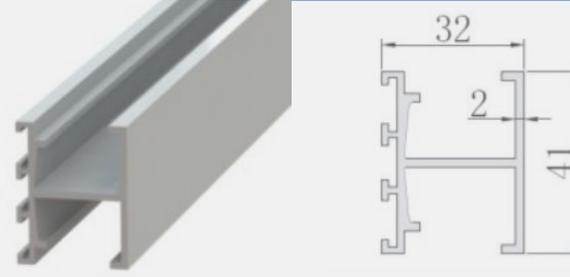


NF-HL632, 0.77kg/m




NF-HL616, 0.66kg/m

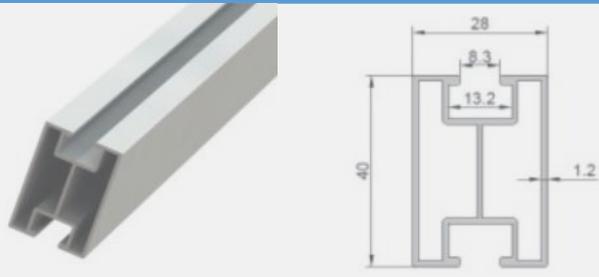


NF-HL657, 0.81kg/m

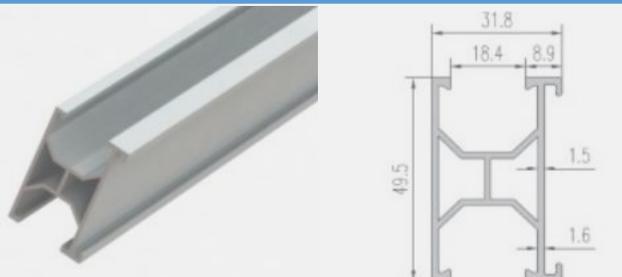


NF-HL505, 0.8kg/m

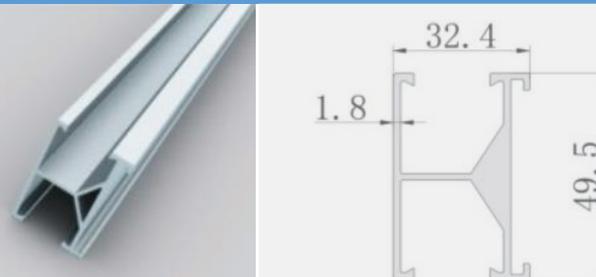


NF-HL653, 1.02kg/m

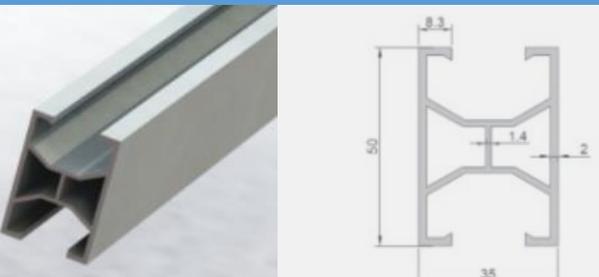

NF-HL665, 0.62kg/m

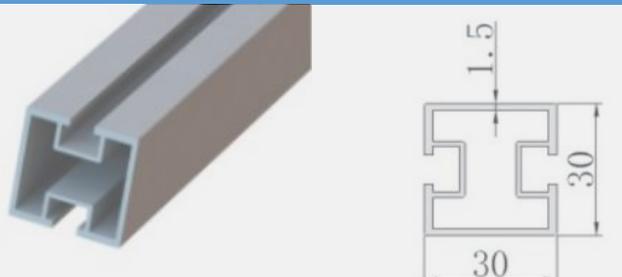


NF-HL679, 0.93kg/m

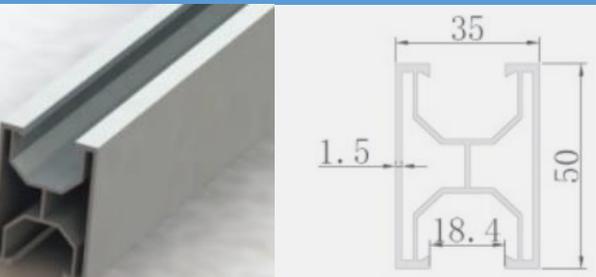


Products: Parts & Accessories

Aluminum Rail Series


NF-HL480, 0.73kg/m

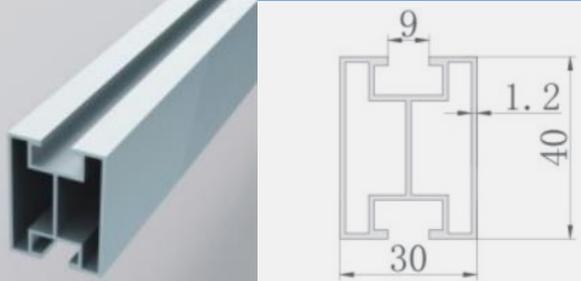


NF-HL016, 0.77kg/m

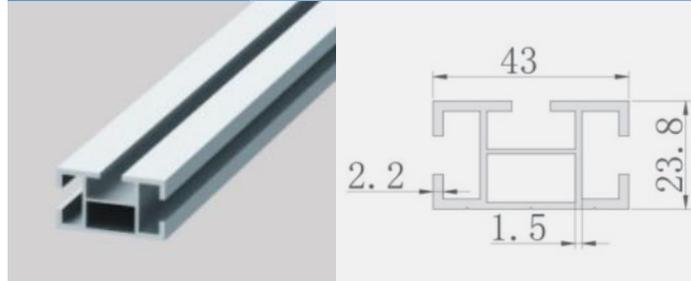


NF-HL636, 0.51kg/m

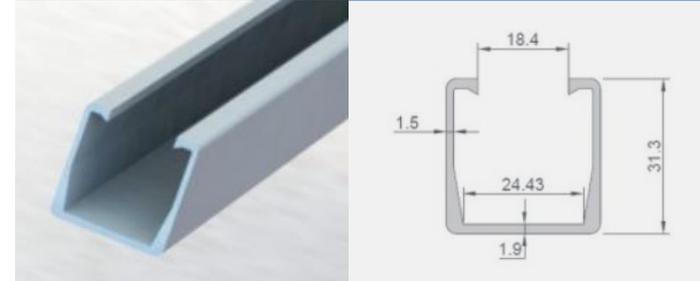


NF-HL716, 2kg/m

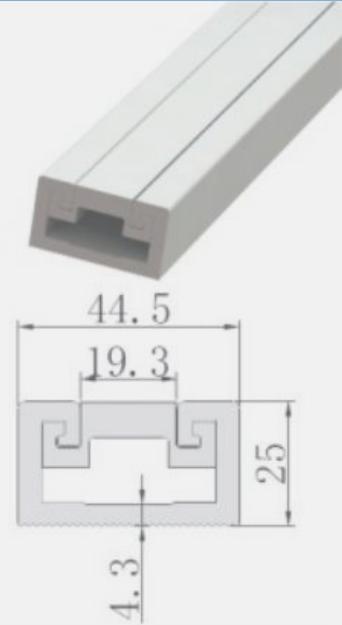


NF-ZJ03, 1.45kg/m

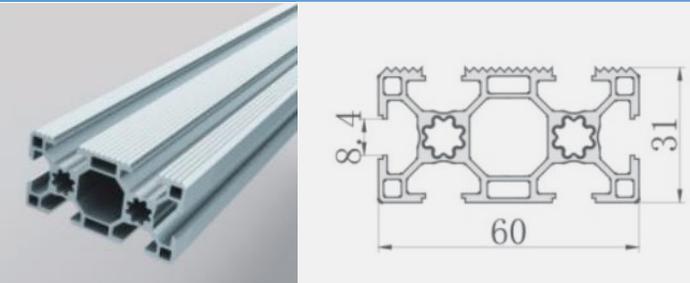


NF-HL680, 0.51kg/m

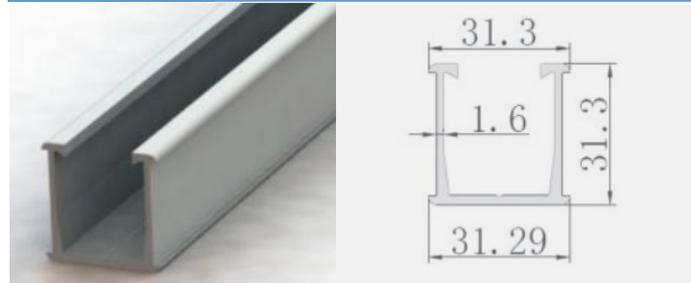


NF-HY1002, 0.7kg/m

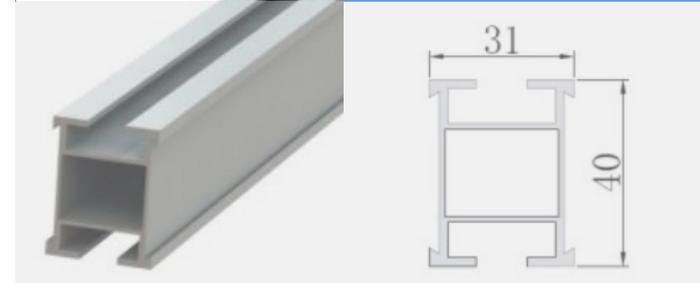


NF-ZJ145, 0.9kg/m

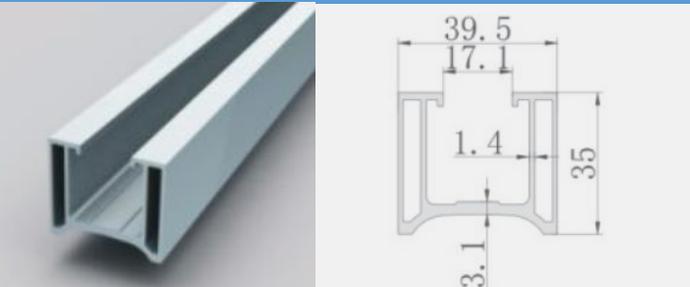

NF-HY2370, 1.32kg/m

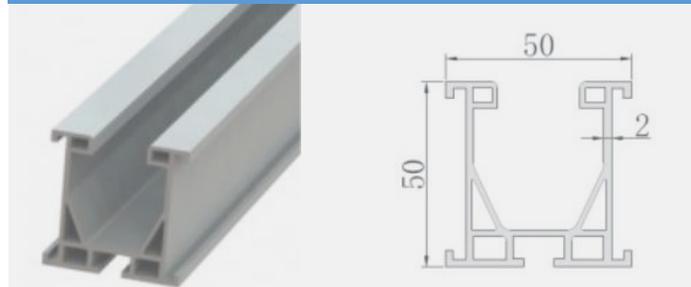


NF-ZJ249, 0.5kg/m

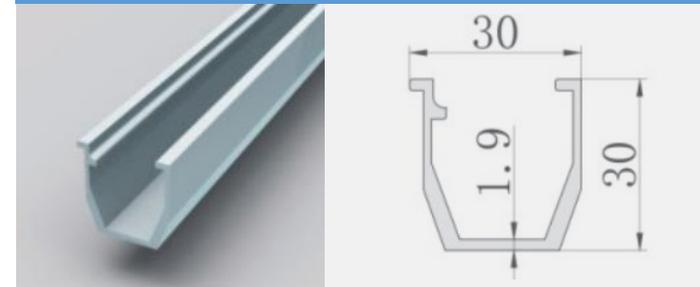


Products: Parts & Accessories

Water Channel Series


NF-ZJ06, 0.52kg/m

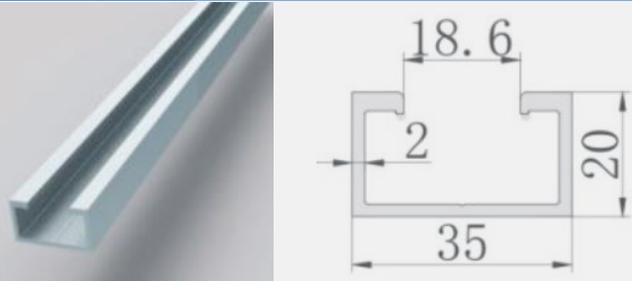


NF-ZJ13, 0.22kg/m

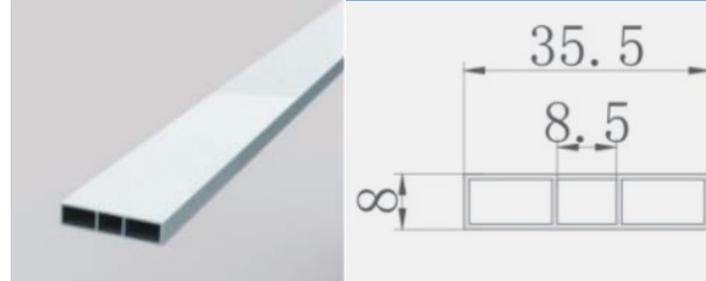


NF-ZJ07, 0.77kg/m

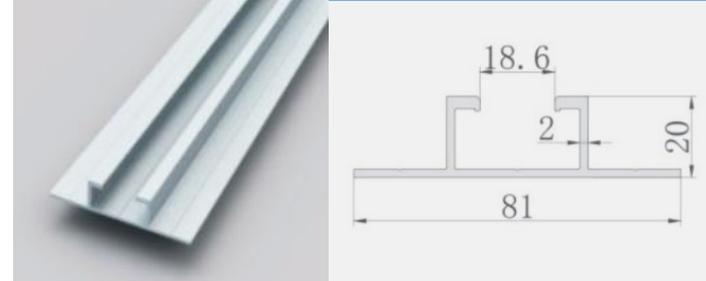


NF-HL630, 0.84kg/m

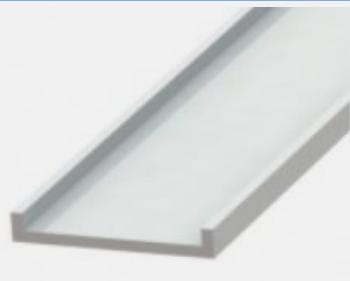



NF-HL654, 1.47kg/m

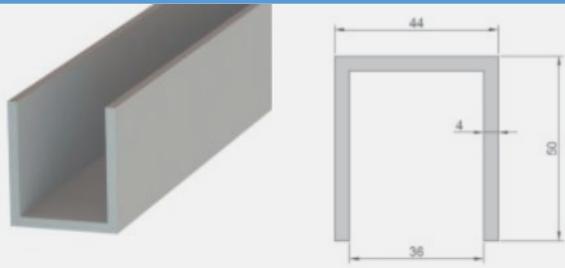


NF-ZJ10, 0.48kg/m

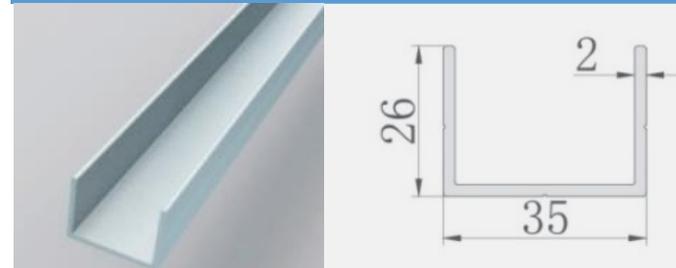


NF-HL613, 0.47kg/m

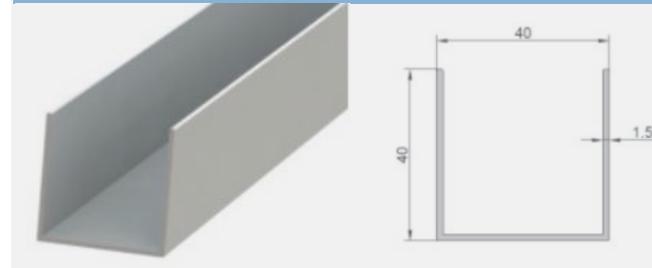


NF-ZJ11, 0.53kg/m

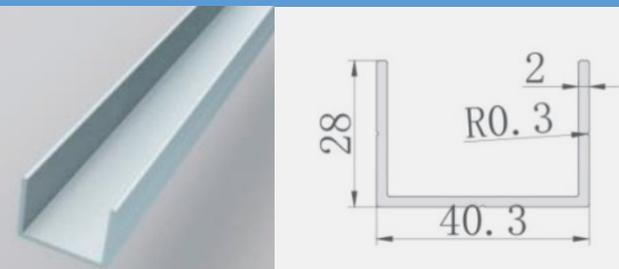

NF-HL614, 0.43kg/m

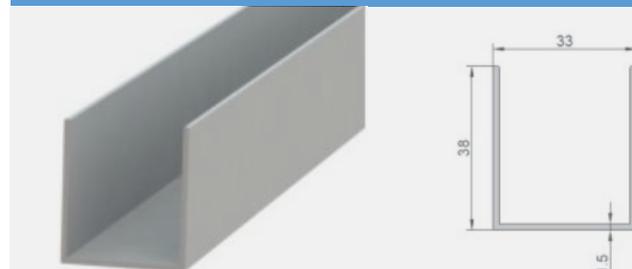


NF-ZJ12, 0.83kg/m

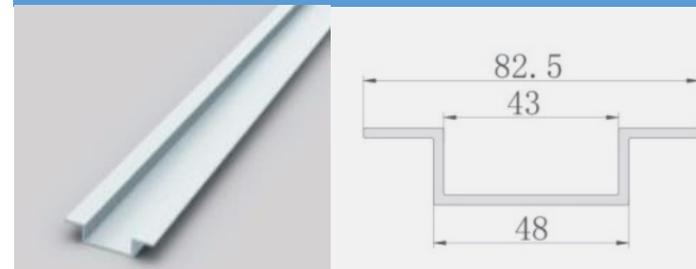


Products: Parts & Accessories

End Clamp Series


NF-HL073, 0.64kg/m, H30mm

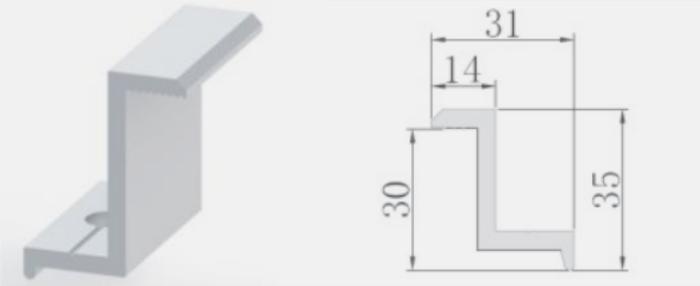

NF-HL052, 0.7kg/m, H35mm

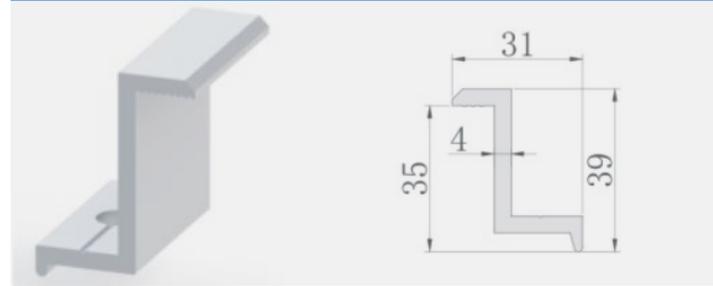


NF-HL053, 0.75kg/m, H40mm

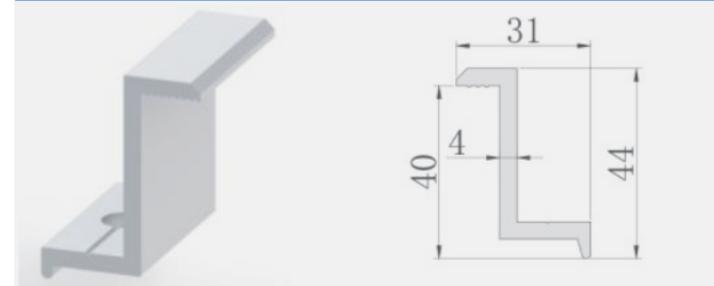


NF-HL327, 0.71kg/m





NF-HL274, 0.77kg/m, H42.5mm

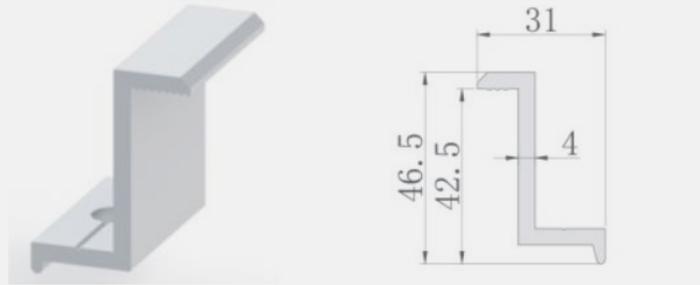


NF-2438D, 0.8kg/m, H45mm

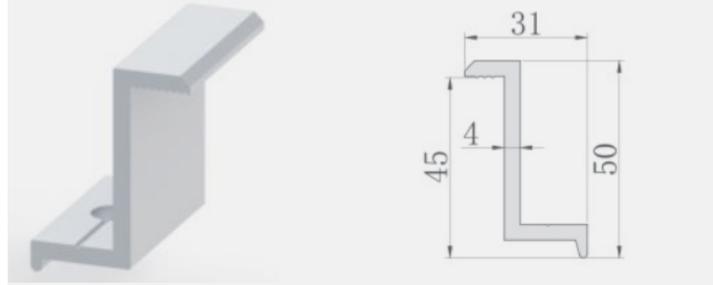


NF-HL083, 0.85kg/m, H50mm

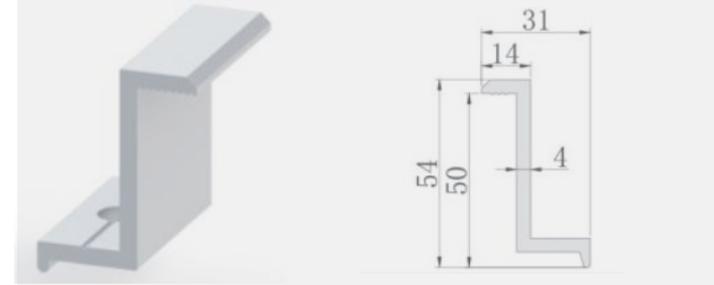


NF-HL331, 0.86kg/m, H38mm

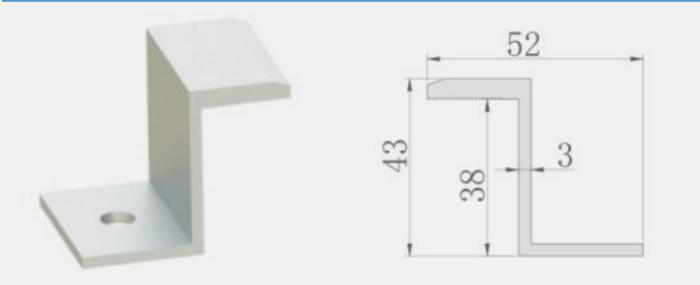

NF-HL336, 0.84kg/m, H37.5mm

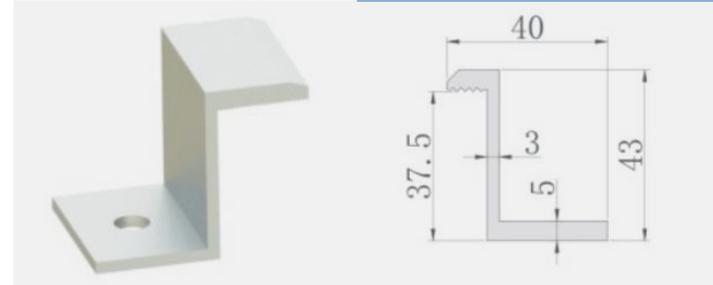


NF-HL326, 0.73kg/m

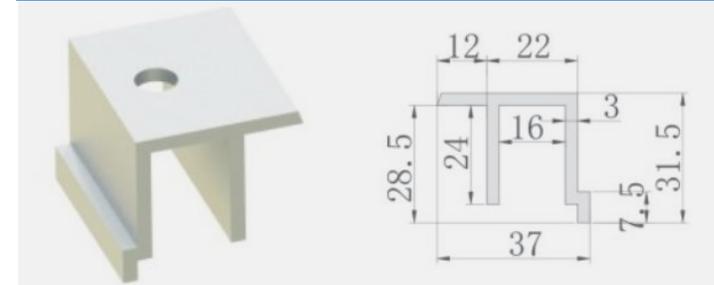


Products: Parts & Accessories

End Clamp Series


NF-ZJ02, 0.77kg/m,H35mm

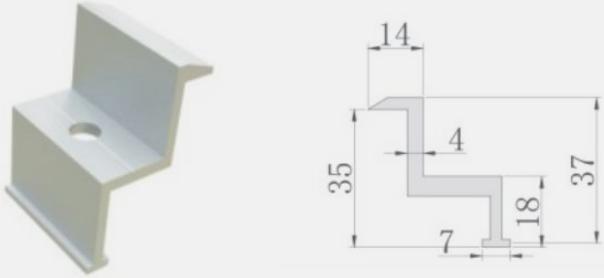


NF-HL528A, 0.7kg/m,H35mm

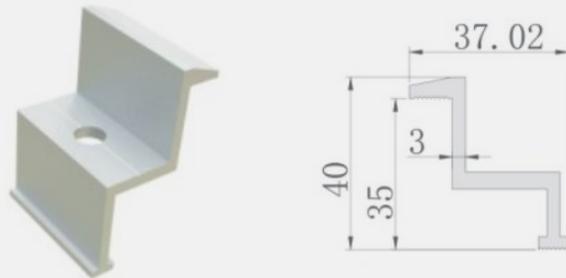


NF-ZJ103, 0.75kg/m,H40mm

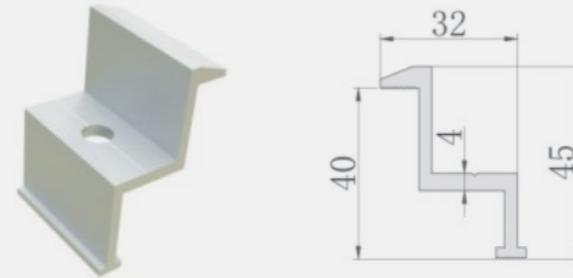


NF-HL097, 0.95kg/m,H45mm

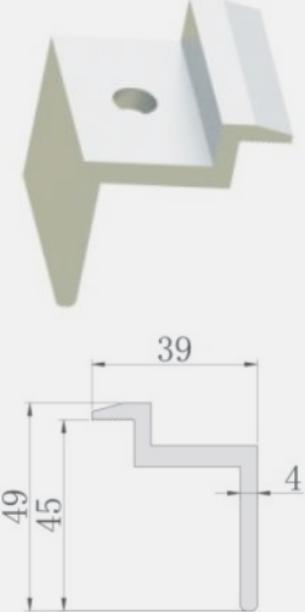


NF-HL528B, 0.7kg/m,H45mm

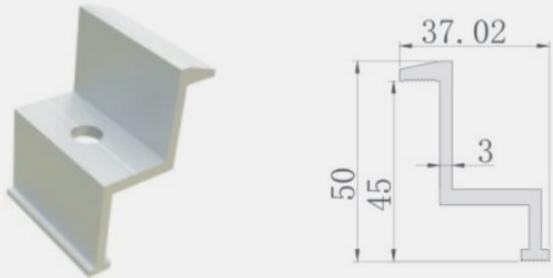


NF-HL011, 0.72kg/m,H50mm

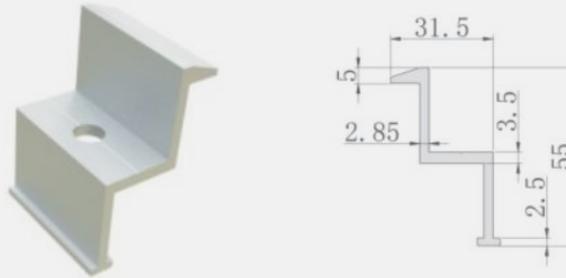


NF-HL422, 1kg/m,H35mm

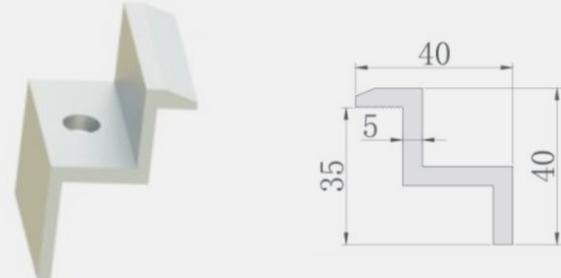


NF-HL425, 1.07kg/m,H40mm

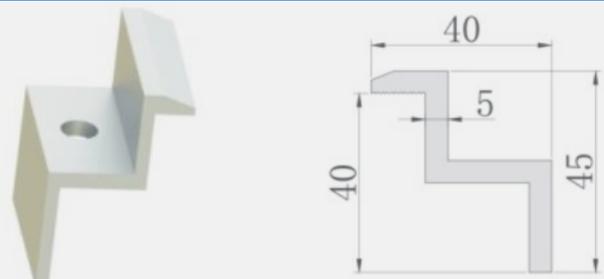

NF-HL427, 0.7kg/m,H45mm

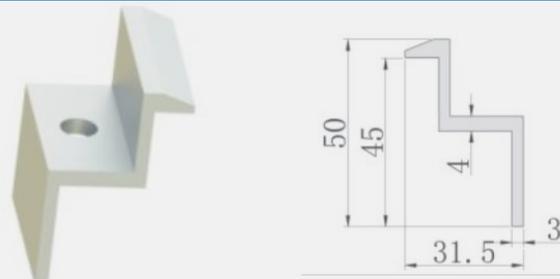



NF-HL096, 0.9kg/m,H40mm

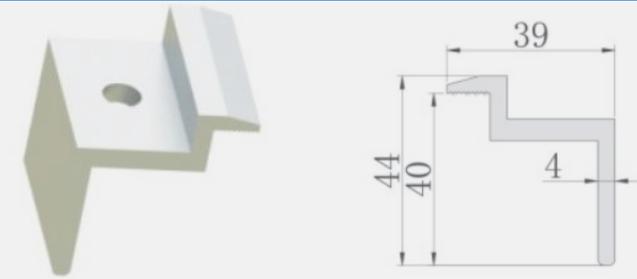



Products: Parts & Accessories

End Clamp Series


NF-HL299, 1.08kg/m, adjustable




NF-HL391, 1.5kg/m, adjustable




NF-HL609, 0.72kg/m




NF-HL576, 0.54kg/m



NF-HL610, 0.68kg/m




NF-HL611, 0.76kg/m





NF-HL666, 0.56kg/m





NF-HL686, 0.8kg/m



NF-DLV001, 0.7kg/m




NF-HL414, 0.79kg/m



Products: Parts & Accessories


Middle Clamp Series

NF-HL084, 0.85kg/m

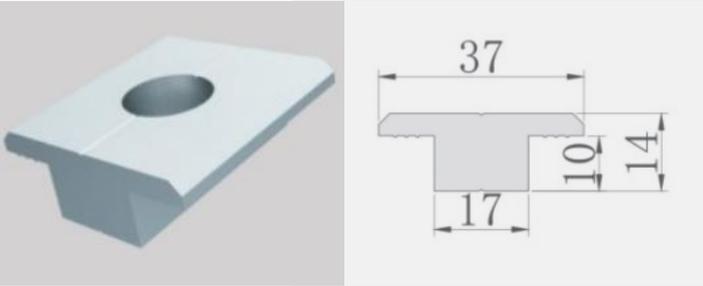


Technical drawing dimensions: 37, 17, 10, 14

NF-HL377, 0.74kg/m

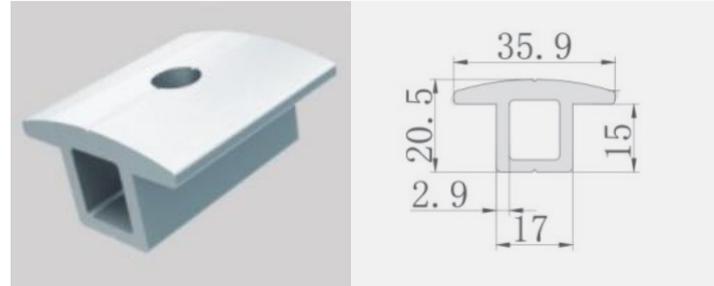

Technical drawing dimensions: 35.9, 20.5, 2.9, 17, 15

NF-DL001, 0.79kg/m

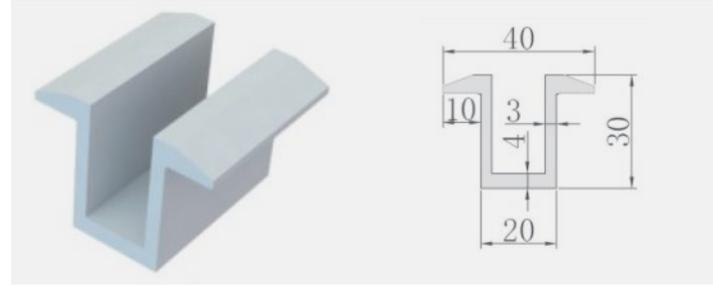


Technical drawing dimensions: 40, 10, 3, 4, 30, 20

NF-HL412, 1kg/m




NF-HL014, 0.75kg/m

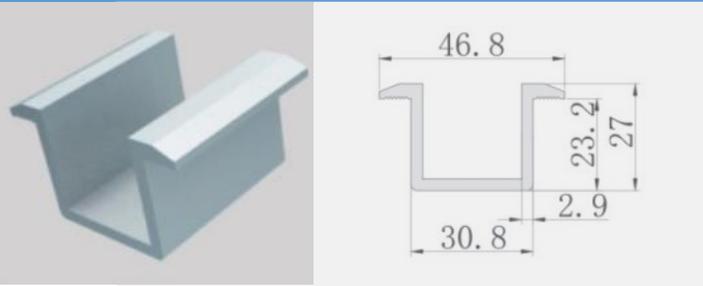


Technical drawing dimensions: 46.8, 23.2, 27, 2.9, 30.8

NF-HL125, 0.85kg/m

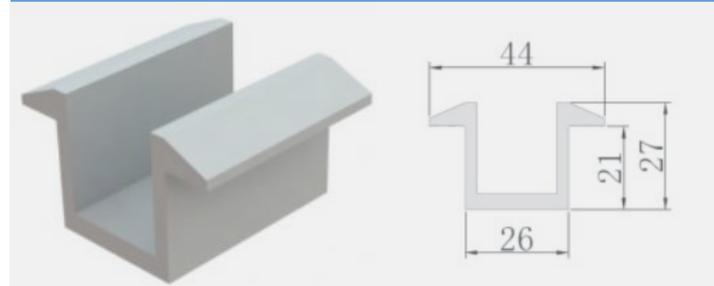


Technical drawing dimensions: 44, 21, 27, 26

NF-HL012, 0.67kg/m

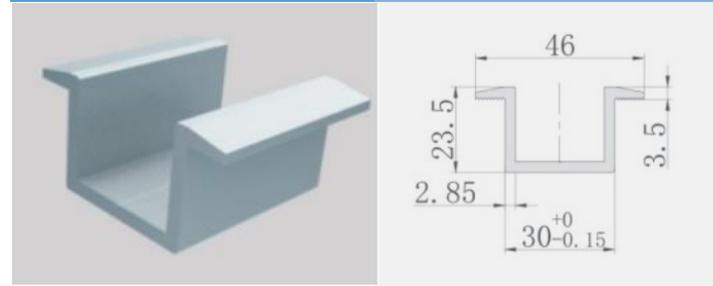


Technical drawing dimensions: 46, 23.5, 2.85, 3.5, 30⁺⁰_{-0.15}

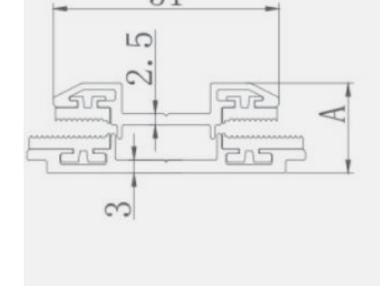


Technical drawing dimensions: 51, 2.5, 3, A

NF-HL421, 0.915kg/m

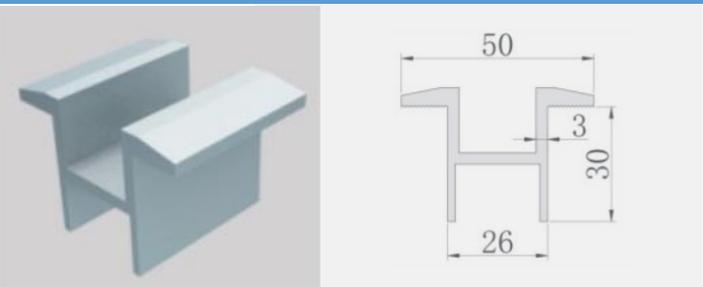


Technical drawing dimensions: 50, 3, 30, 26

NF-HL098, 0.98kg/m

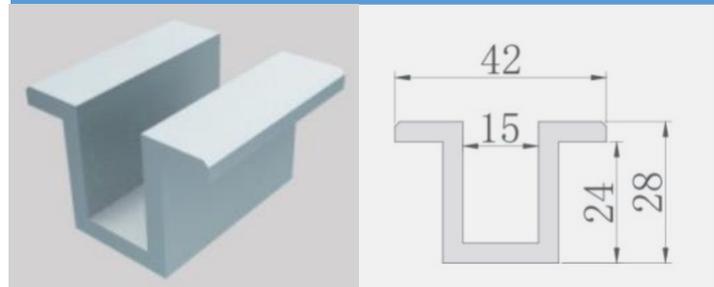


Technical drawing dimensions: 42, 15, 24, 28

NF-DLV002, 0.9kg/m

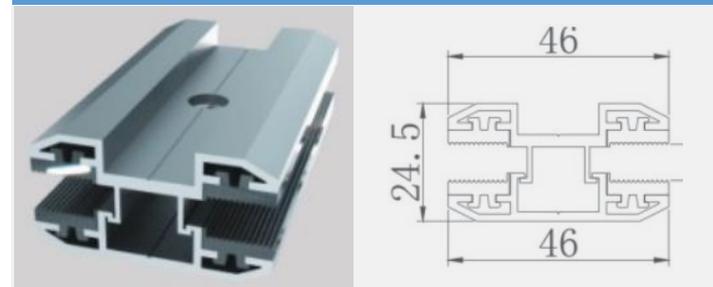


Technical drawing dimensions: 46, 24.5, 46




Products: Parts & Accessories

Middle Clamp Series


NF-HL170, 0.62kg/m

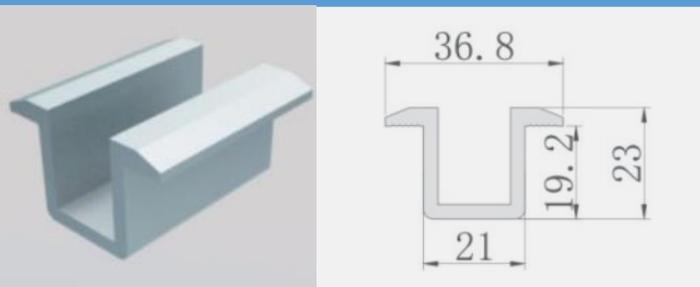


NF-HL248, 0.88kg/m

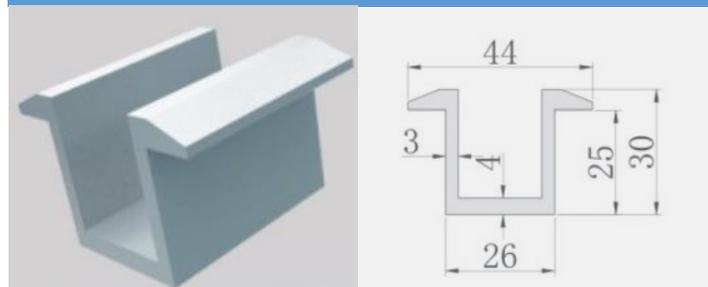


NF-HL268, 1.14kg/m

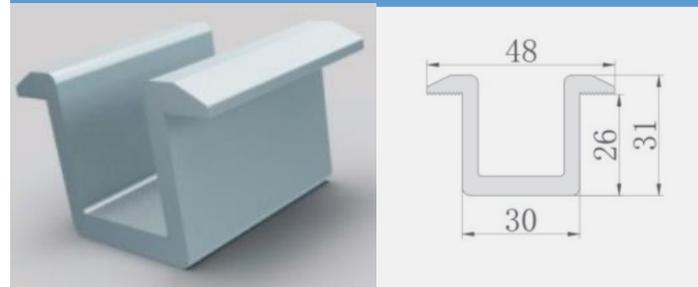


NF-HL667, 0.64kg/m

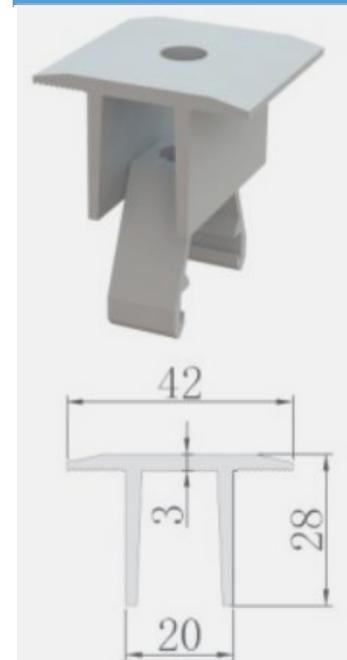


NF-HL328, 0.93kg/m

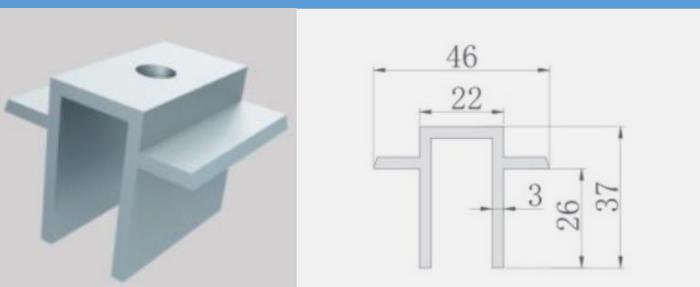


NF-HL365, 0.71kg/m

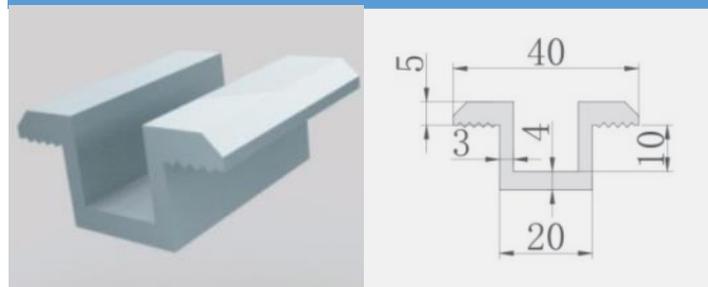


NF-HL763, 0.87kg/m

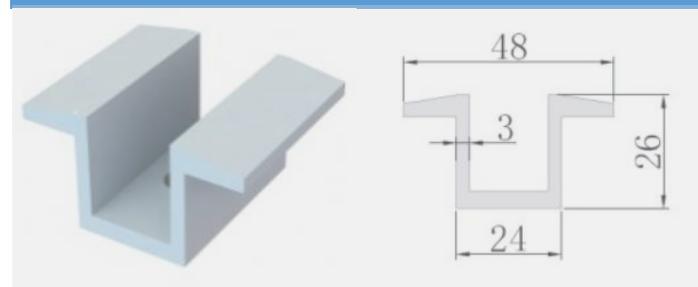


NF-HL685, 0.62kg/m

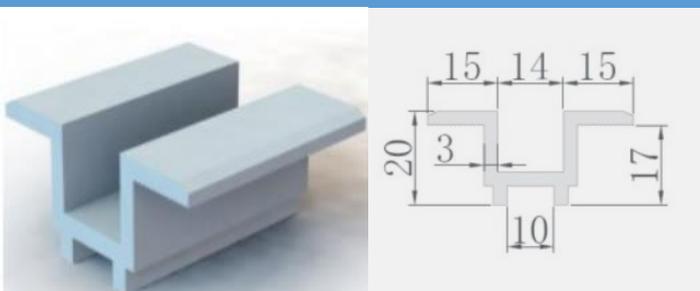

NF-HL607, 0.67kg/m

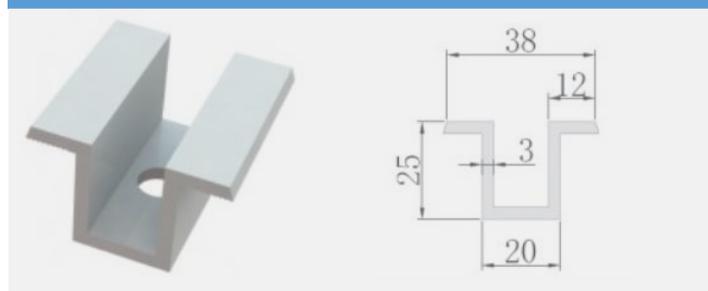


NF-HL612, 0.53kg/m

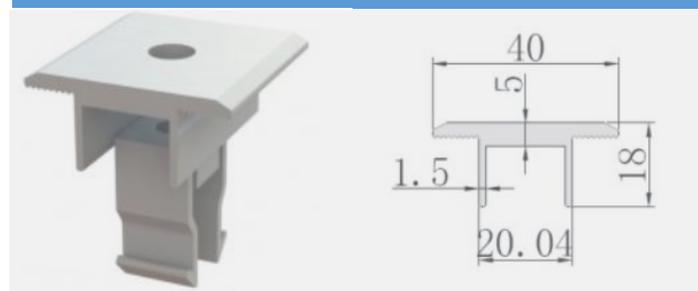

Products: Parts & Accessories


Foot and Pallet Series

NF-HL744, 5.11kg/m

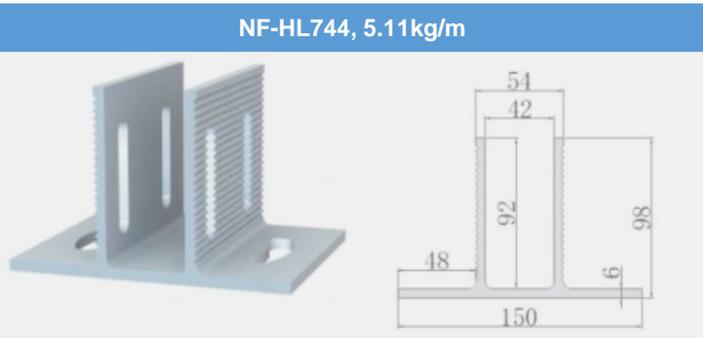


Technical drawing showing dimensions: 150 (width), 48 (base offset), 92 (height), 51 (top width), 42 (inner top width), 6 (flange thickness), and 98 (total height).

NF-HL744, 5.11kg/m

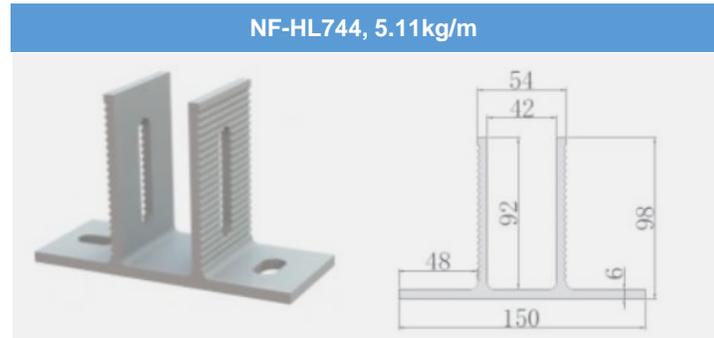

Technical drawing showing dimensions: 150 (width), 48 (base offset), 92 (height), 51 (top width), 42 (inner top width), 6 (flange thickness), and 98 (total height).

NF-ZJ118, 6.12kg/m

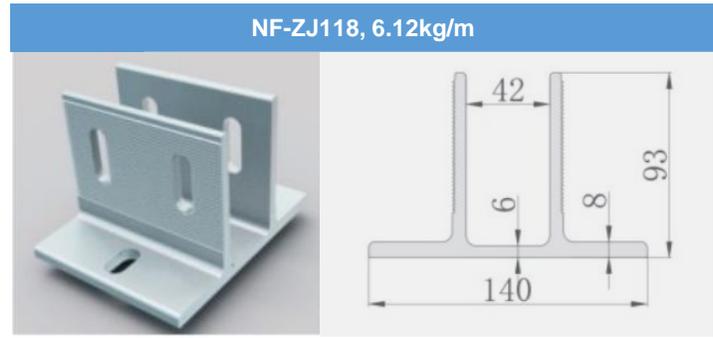


Technical drawing showing dimensions: 140 (width), 42 (height), 6 (flange thickness), 8 (flange offset), and 93 (total height).

NF-HY1872, 2.54kg/m




3D rendering of the NF-HY1872 part.

NF-ZJ118, 6.12kg/m

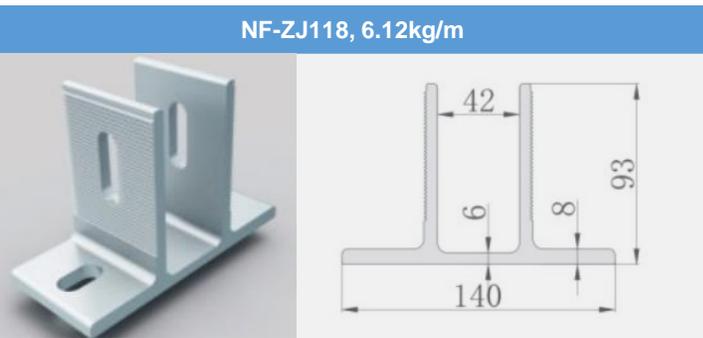


Technical drawing showing dimensions: 140 (width), 42 (height), 6 (flange thickness), 8 (flange offset), and 93 (total height).

NF-HL264, 3.78kg/m

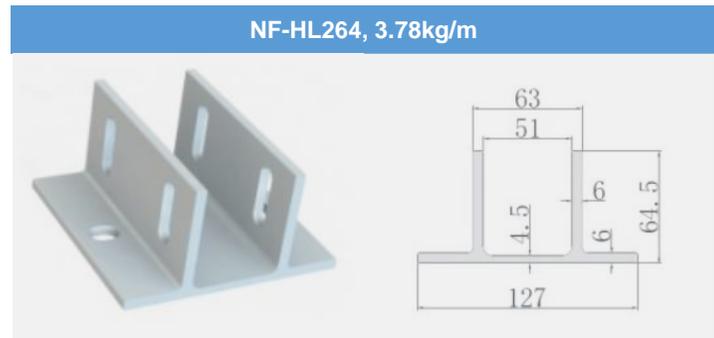


Technical drawing showing dimensions: 127 (width), 63 (top width), 51 (inner top width), 4.5 (flange thickness), 6 (flange offset), 64.5 (total height), and 6 (flange thickness).

NF-HL264, 3.78kg/m

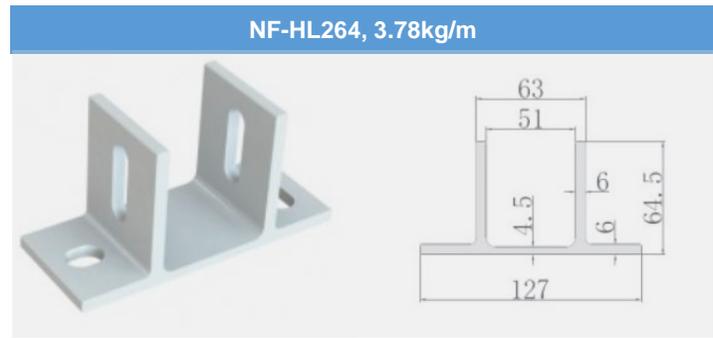


Technical drawing showing dimensions: 127 (width), 63 (top width), 51 (inner top width), 4.5 (flange thickness), 6 (flange offset), 64.5 (total height), and 6 (flange thickness).

NF-HY1872, 2.54kg/m

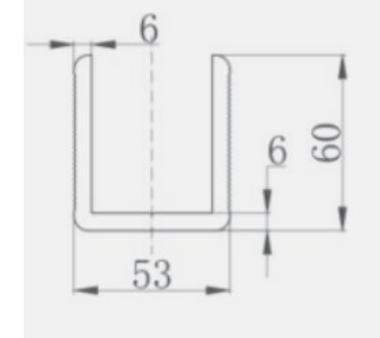

Technical drawing showing dimensions: 53 (width), 6 (flange thickness), 60 (height), and 6 (flange offset).

NF-ZJ126/252, 7.17/4.28kg/m

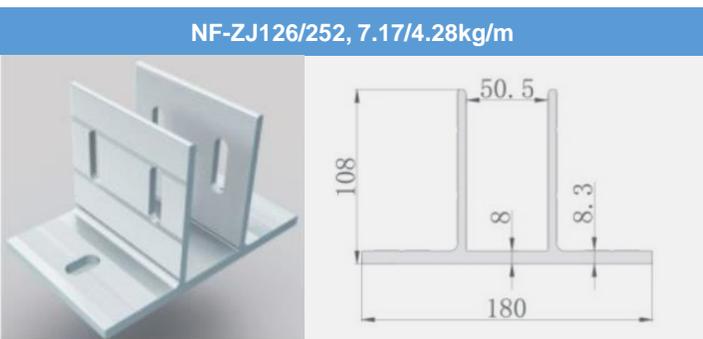


Technical drawing showing dimensions: 180 (width), 108 (height), 50.5 (top width), 8 (flange thickness), and 8.3 (flange offset).

NF-ZJ126/252, 7.17/4.28kg/m



Technical drawing showing dimensions: 180 (width), 108 (height), 50.5 (top width), 8 (flange thickness), and 8.3 (flange offset).

NF-HY1872, 2.54kg/m

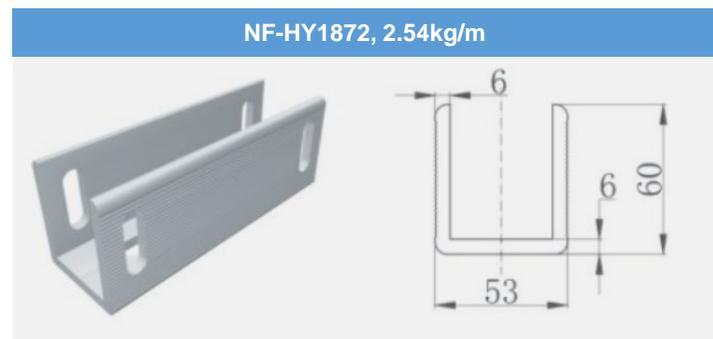


Technical drawing showing dimensions: 53 (width), 6 (flange thickness), 60 (height), and 6 (flange offset).


Products: Parts & Accessories

Foot and Pallet Series


NF-HL663, 3.85kg/m

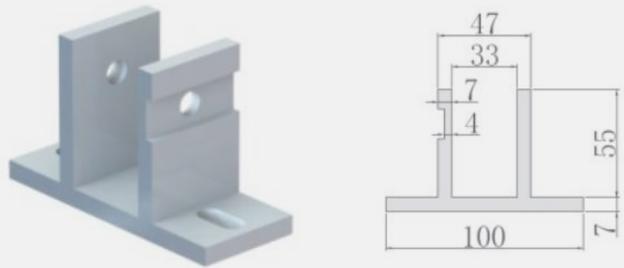


NF-HL056, 2.87kg/m

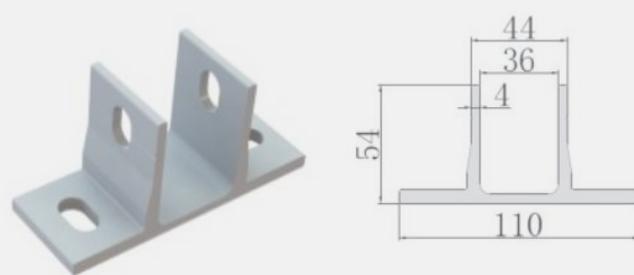


NF-HL570, 3.9kg/m

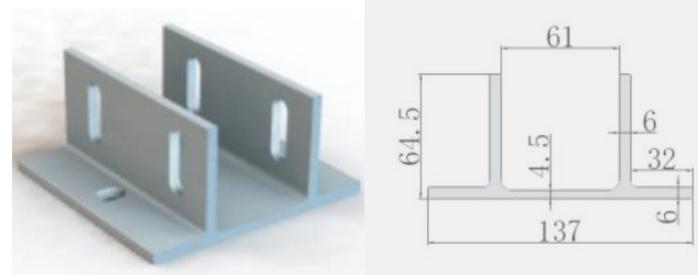

NF-HL523, 0.69kg/m

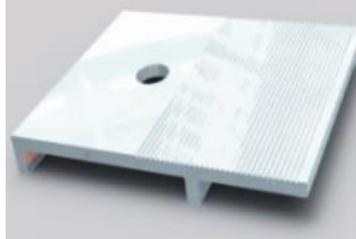


NF-HL570, 3.9kg/m

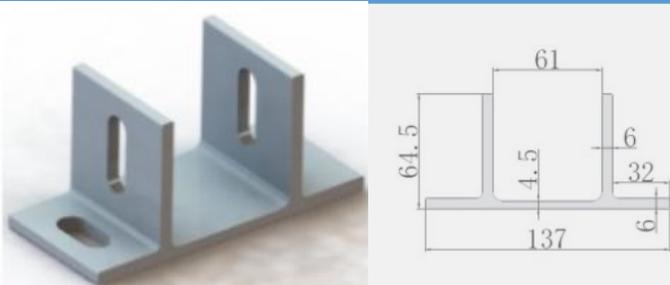


NF-ZJ270, 1.4kg/m




NF-ZJ271, 1.1kg/m

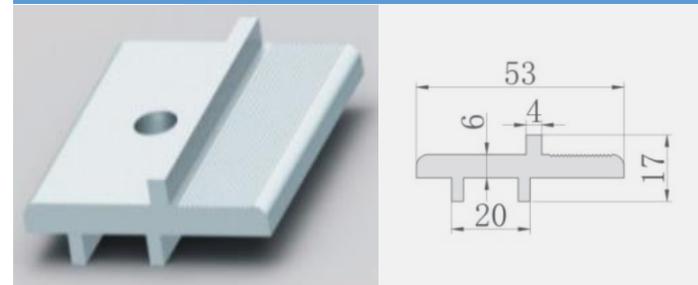


NF-ZJ276, 0.68kg/m

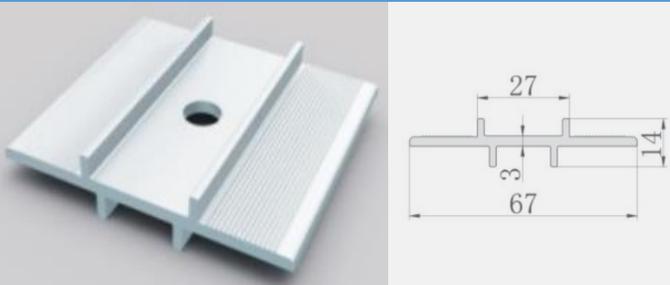

NF-ZJ277, 0.63kg/m

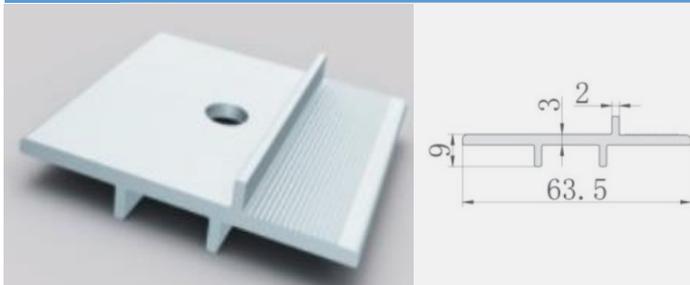


NF-HL522, 0.87kg/m

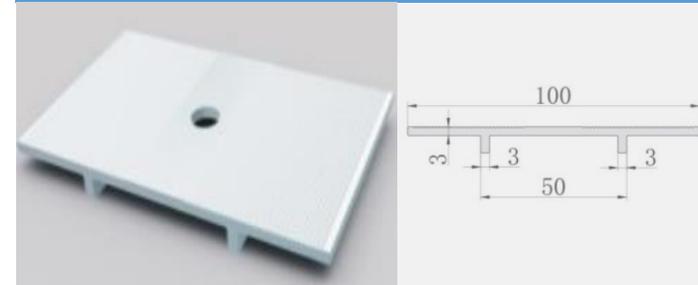


Products: Parts & Accessories

Beam/Rail Joiner Series


NF-HL569, 2.57kg/m

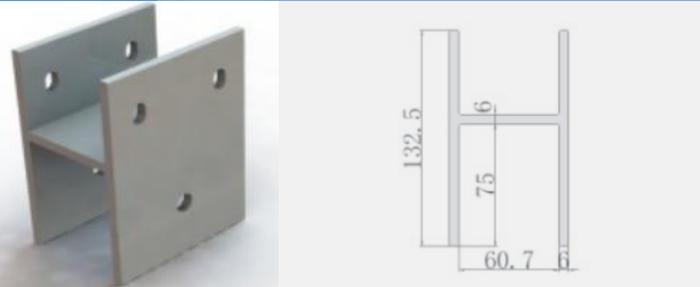


NF-HL262/624, 2.84kg/m

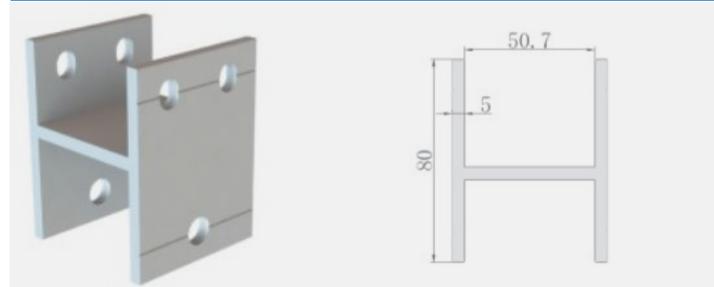


NF-HY1872, 2.54kg/m

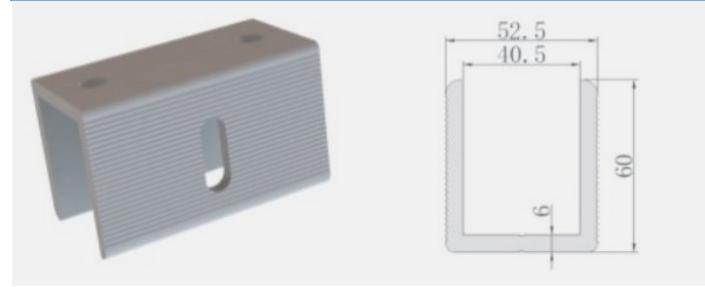


NF-HL523, 0.69kg/m

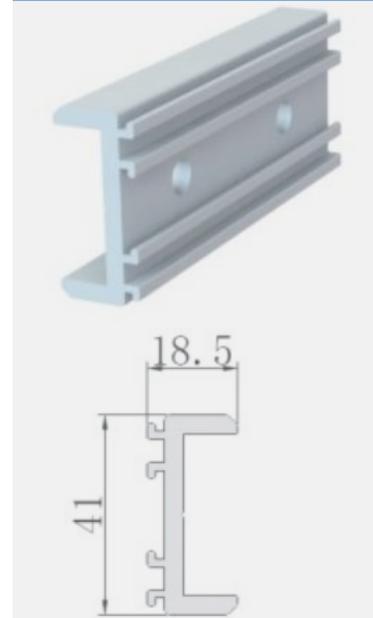


NF-HL049/102, 0.75kg/m

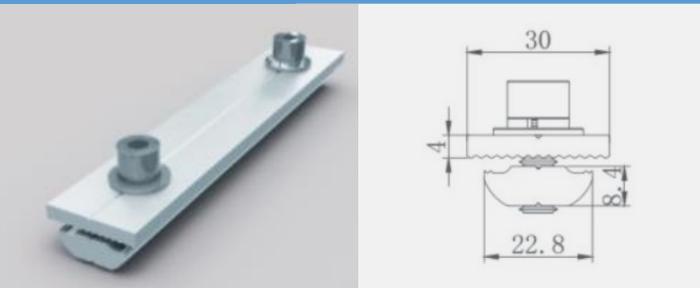


NF-HL660, 0.26kg/m

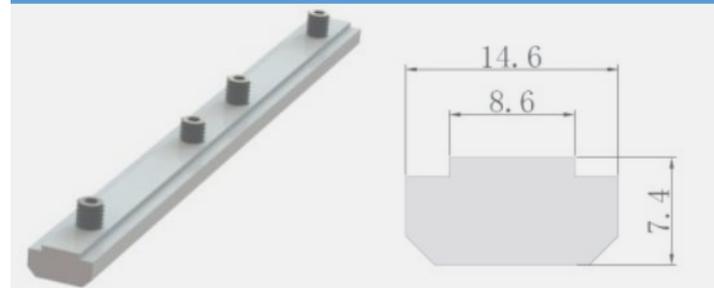


NF-HL203, 0.62kg/m, fit for NF-HL202

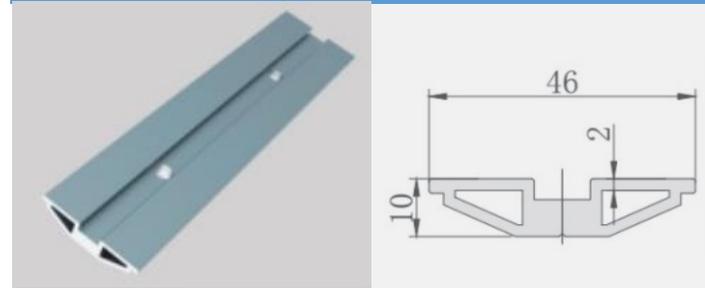


NF-ZJ276, 0.68kg/m

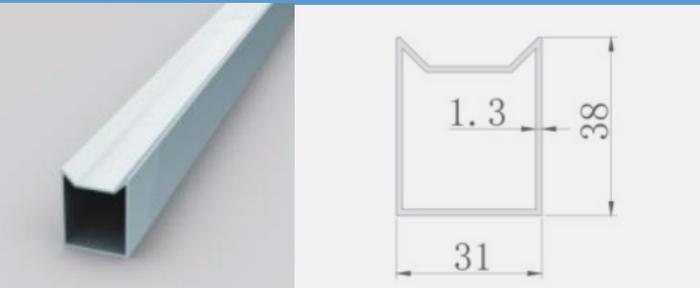

NF-HL574, 0.74kg/m, fit for NF-HL573

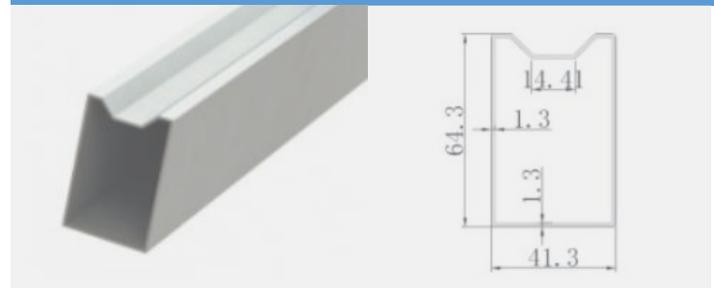


NF-HL747, 0.54kg/m

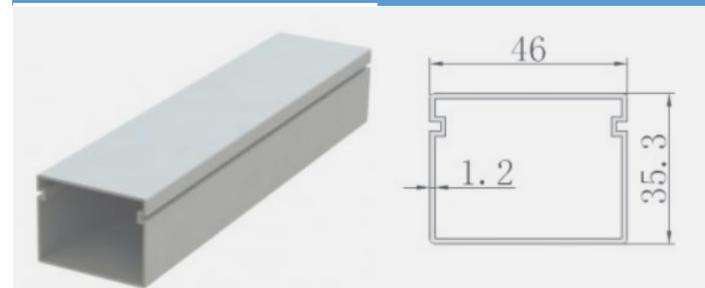


Products: Parts & Accessories

L foot And Rail Clamp Series


NF-HY2095, 2.43kg/m

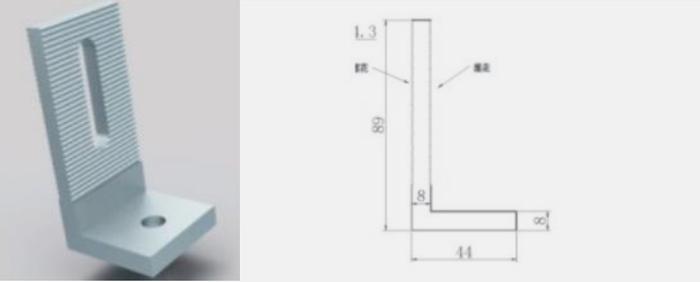


NF-HL050, 2.1kg/m

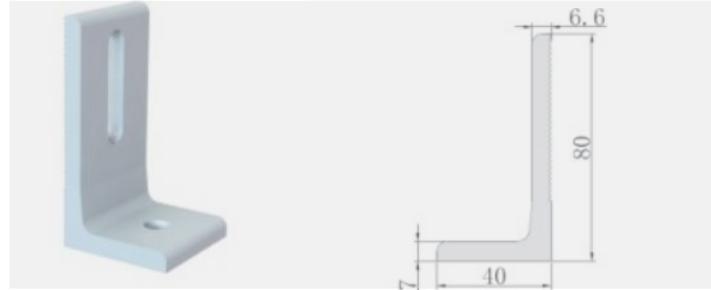


NF-HL708, 3.85kg/m

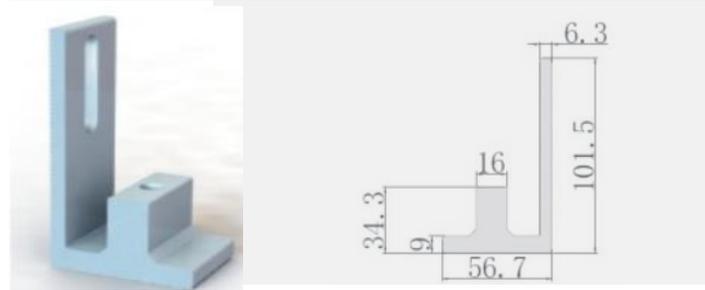


NF-HL523, 0.69kg/m

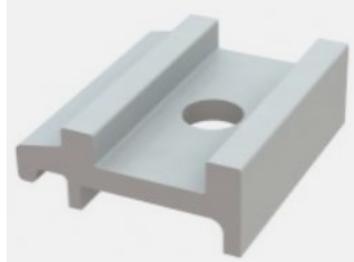


NF-HL289, 0.78kg/m

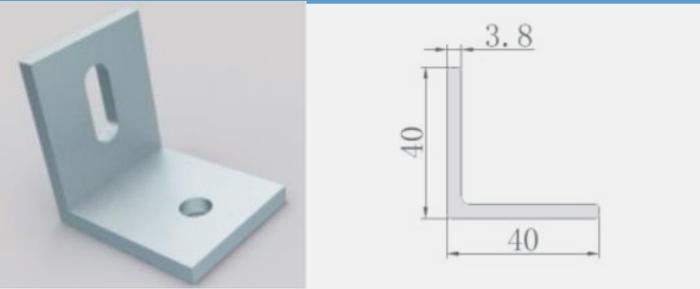


NF-HL048, 1.3kg/m

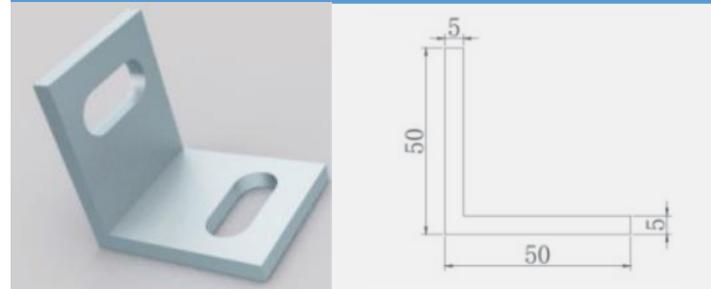


NF-HY1869, 1.22kg/m




NF-HL263, 0.45kg/m

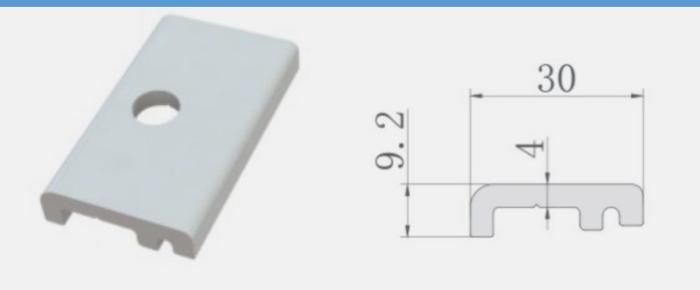

NF-HY2371, 0.48kg/m

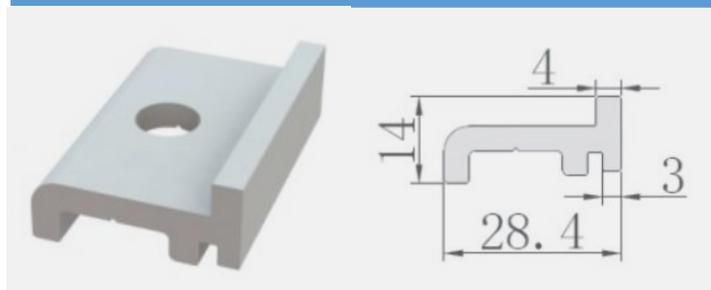


NF-HL322, 0.67kg/m

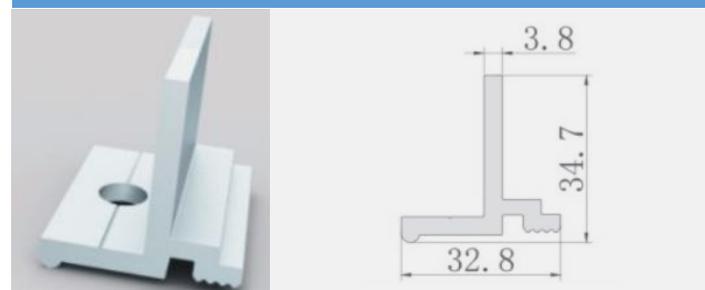


Products: Parts & Accessories

Slider Nut Series


NF-HL200, 0.45kg/m

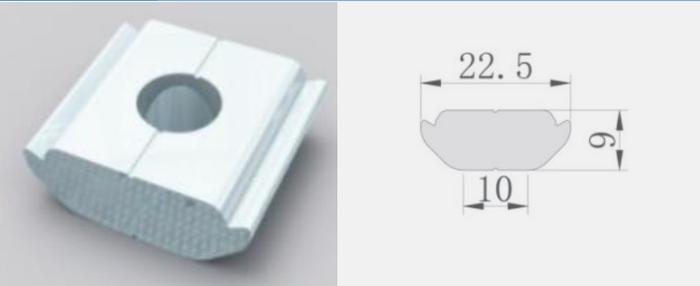


NF-HL102, 0.44kg/m

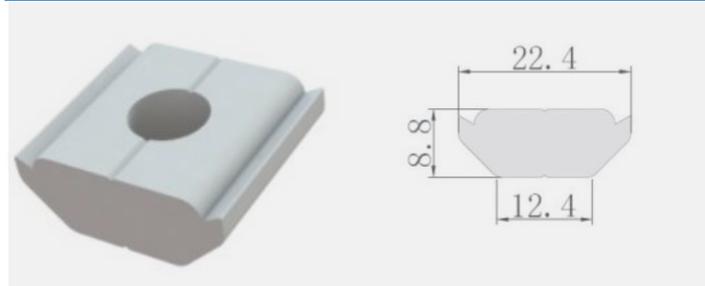


NF-HY1313, 0.43kg/m

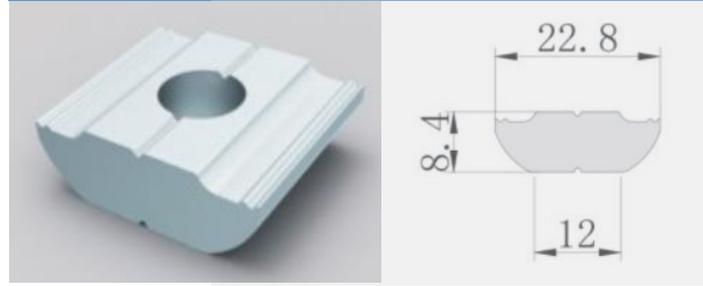


NF-HL049, 0.32kg/m

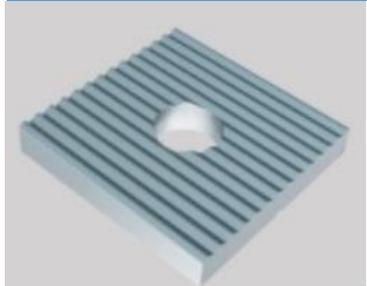



NF-ZJ146, 0.55kg/m

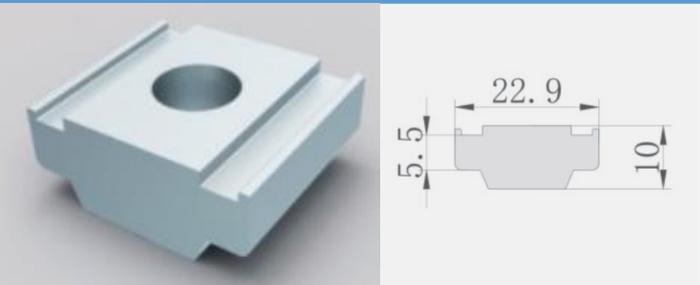

NF-ZJ28, 0.57kg/m

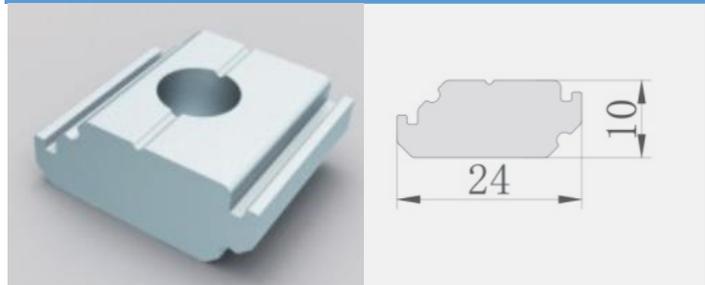


NF-HL164, 0.49kg/m

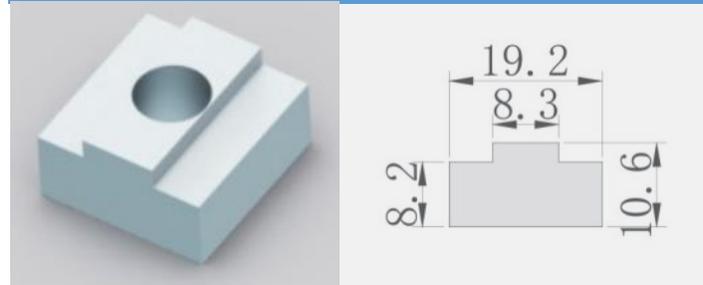

NF-ZJ48, 0.43kg/m



NF-HY1567, 0.69kg/m

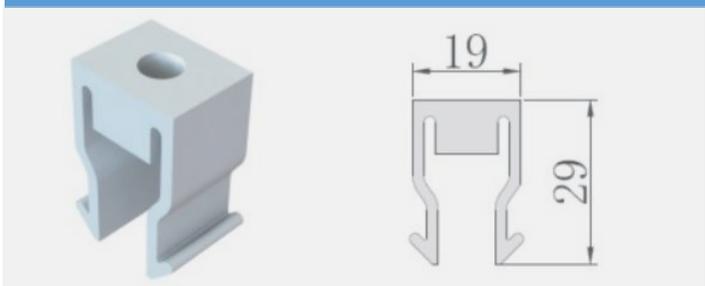


NF-HY1003, 0.57kg/m




Products: Parts & Accessories

Clip Series


NF-HL608, 1.33kg/m, clip for color steel tile

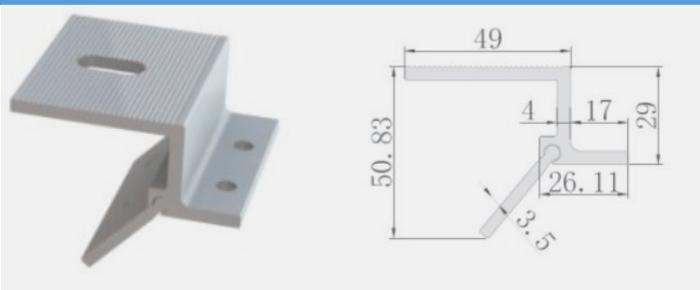


NF-HL618, 1.7kg/m

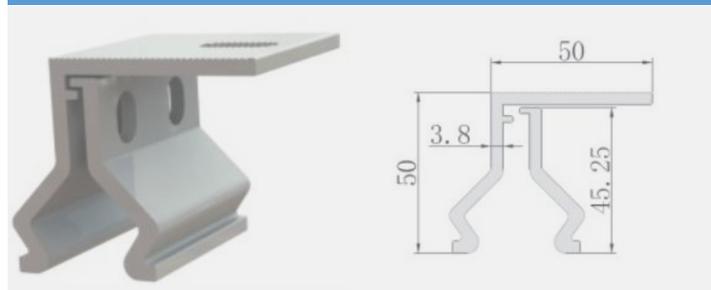


NF-HL017, 2.01kg/m

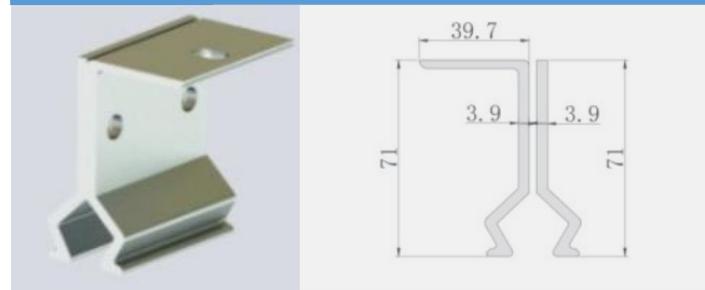


NF-ZJ298, 2.21kg/m

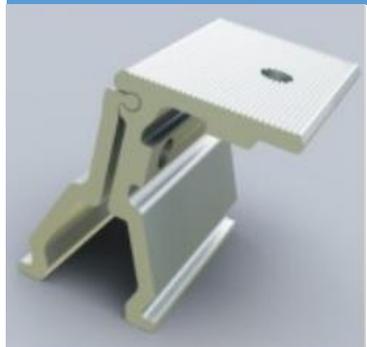



NF-HL212, 2.16kg/m

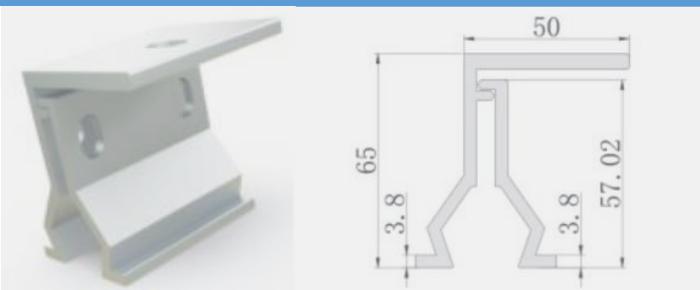


NF-HL399, 1.9kg/m

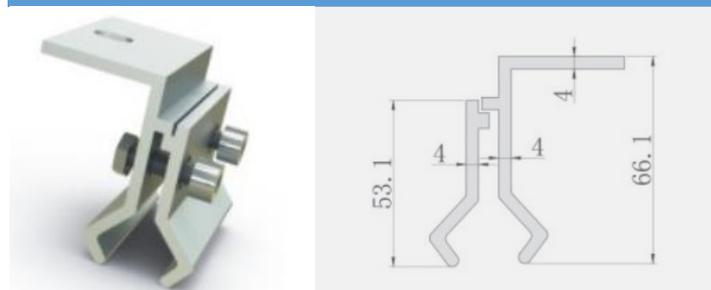


NF-ZJ100, 1.87kg/m

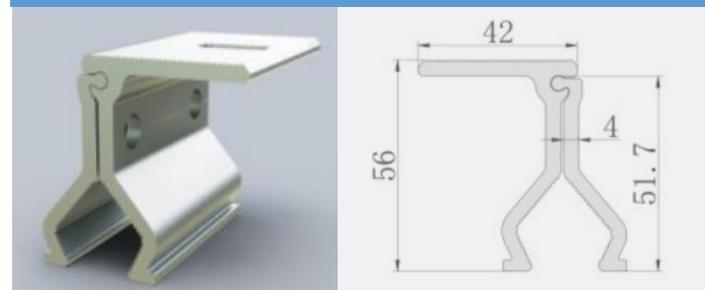


NF-ZJ105, 1.84kg/m

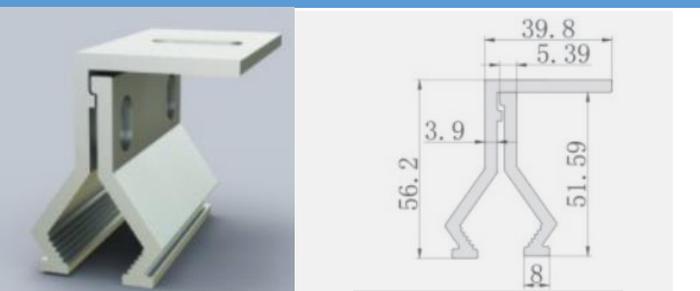

NF-HL149, 2.85kg/m

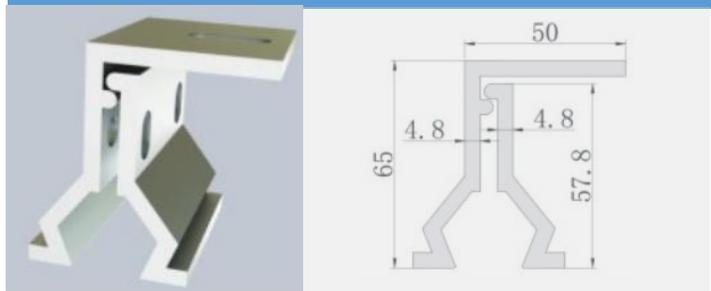


NF-ZJ288, 2.84kg/m

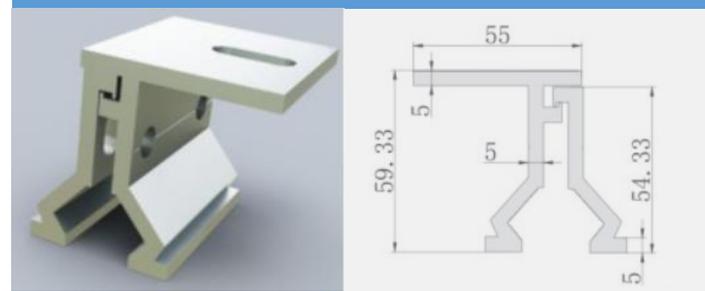

Products: Parts & Accessories

Clip Series

NF-HL107, 1.16kg/m

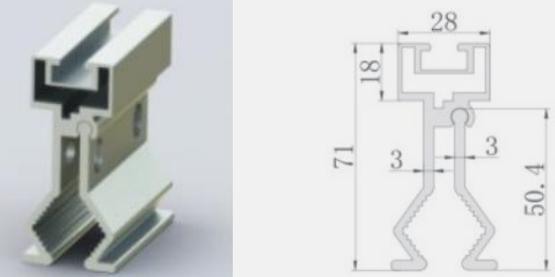


NF-HL174, 2.36kg/m




NF-HL756, 1.24kg/m




NF-HL758, 1.76kg/m




NF-HL429, 2.04kg/m

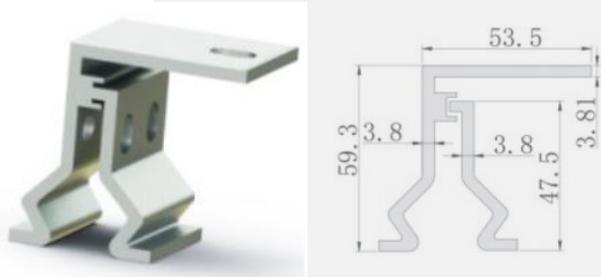


NF-ZJ68, 1.73kg/m

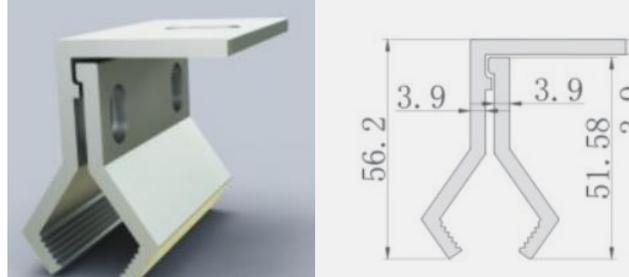


NF-HL671, 1.8kg/m

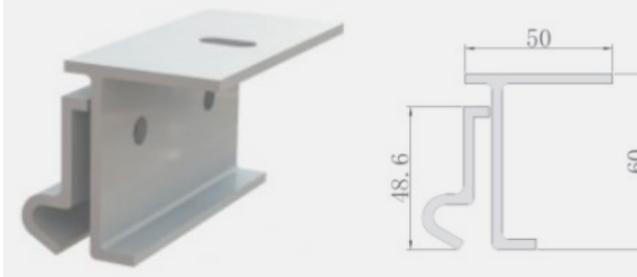



NF-HL681, 2.24kg/m

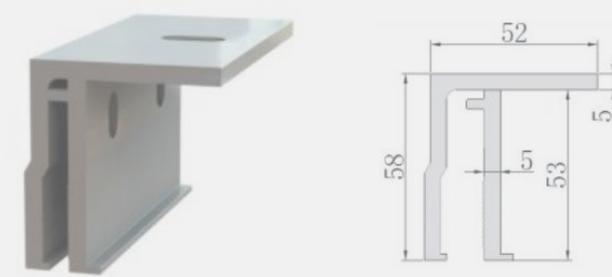

NF-HL683, 1.82kg/m

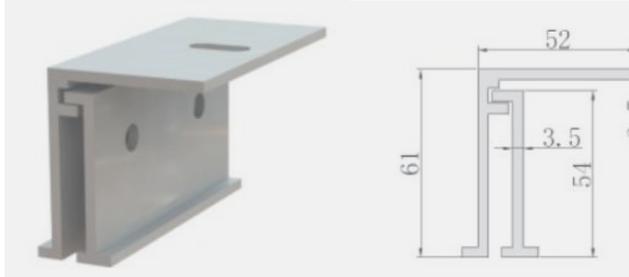


NF-HL714, 1.25kg/m

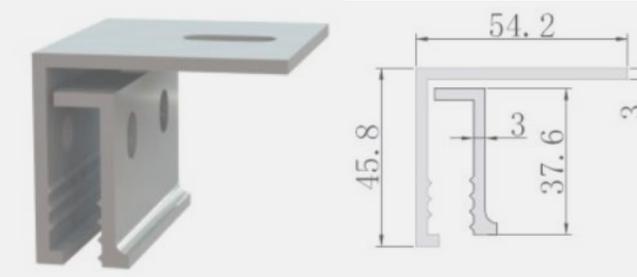


Products: Parts & Accessories

Clip Series


NF-HL214, 1.81kg/m

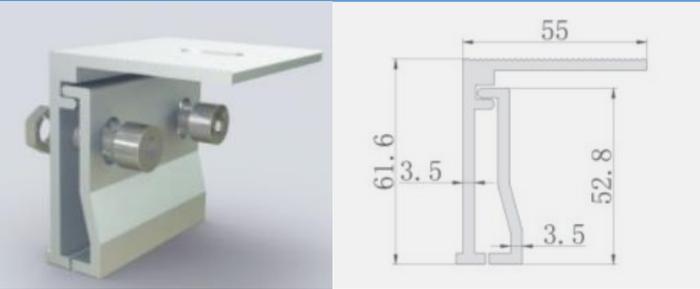


NF-HL395, 2.23kg/m

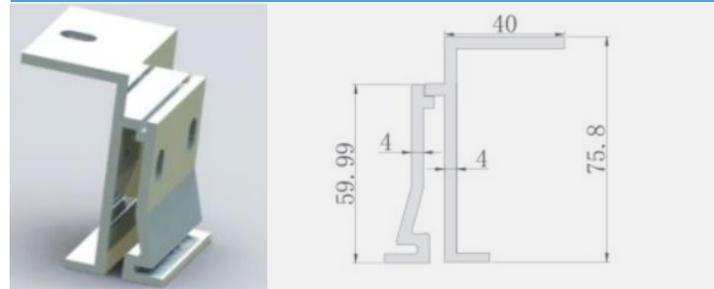


NF-HL397, 2.17kg/m

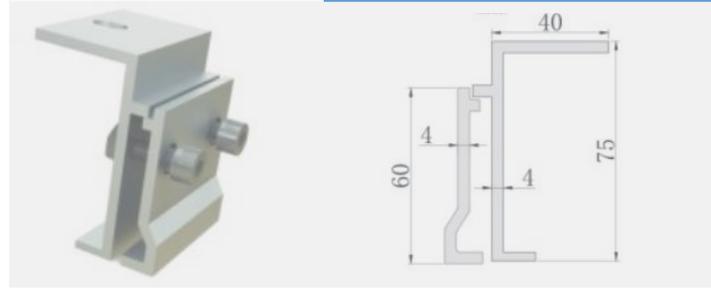


NF-HL758, 1.76kg/m

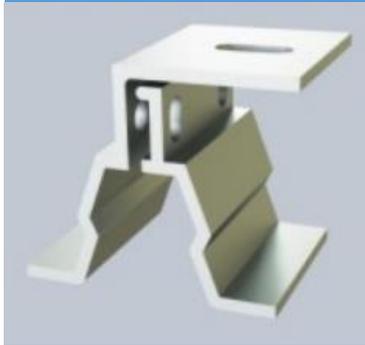



NF-HL507/508, 2.49kg/m

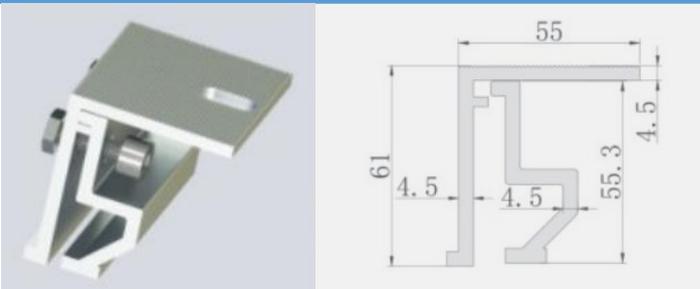


NF-HL530/508, 2.4kg/m

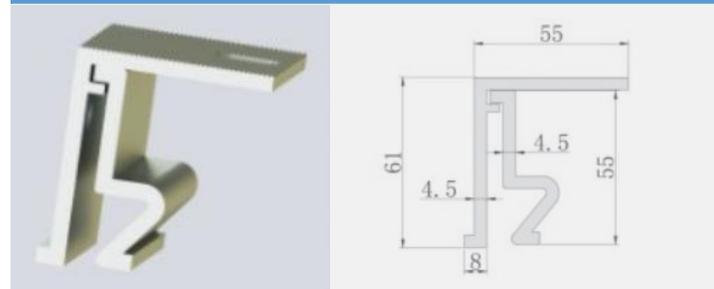


NF-HL643, 1.42kg/m

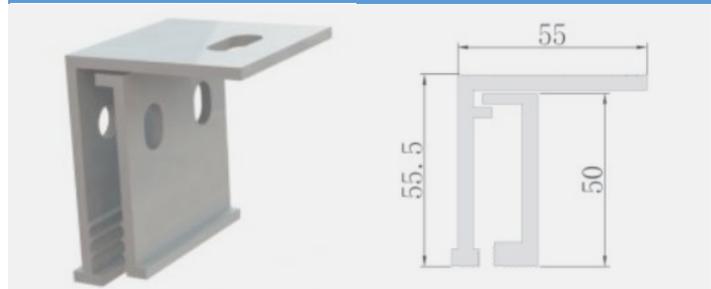


NF-HL645, 2.21kg/m

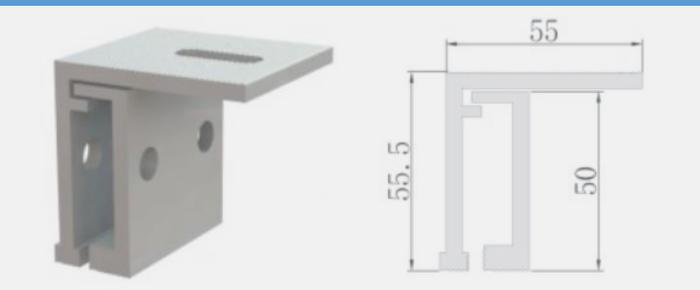

NF-ZJ307, 2.47kg/m

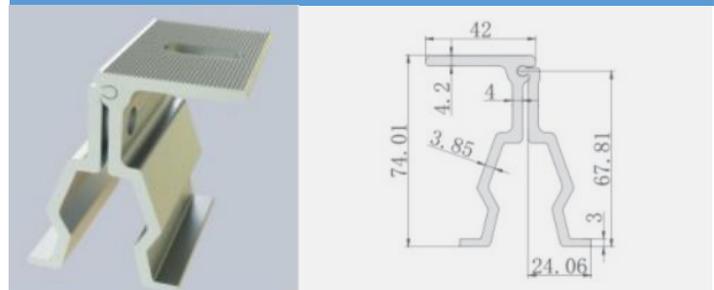


NF-HL309, 2.89kg/m

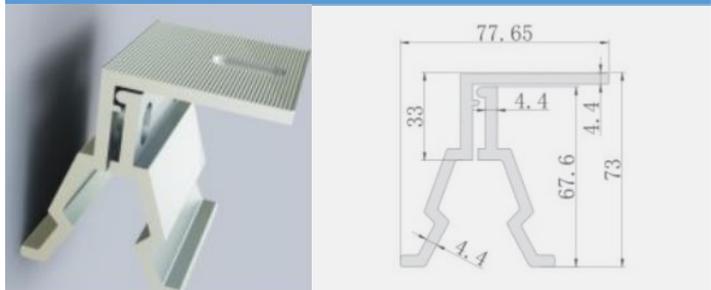


Products: Parts & Accessories

Clip Series


NF-HL393, 2.34kg/m



NF-HL401, 3.37kg/m




NF-HL655, 1.76kg/m




NF-SG0444, 1.61kg/m




NF-HL775, 1.74kg/m





NF-HL761, 1.25kg/m





NF-HL426, 2.17kg/m






NF-HL521, 1.67kg/m



NF-ZJ257, 1.05kg/m




NF-SG0362, 1.45kg/m

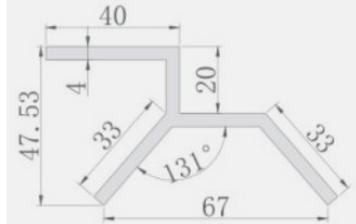

Products: Parts & Accessories


Clip & Wing Nut Series

NF-HL740, 1.03kg/m

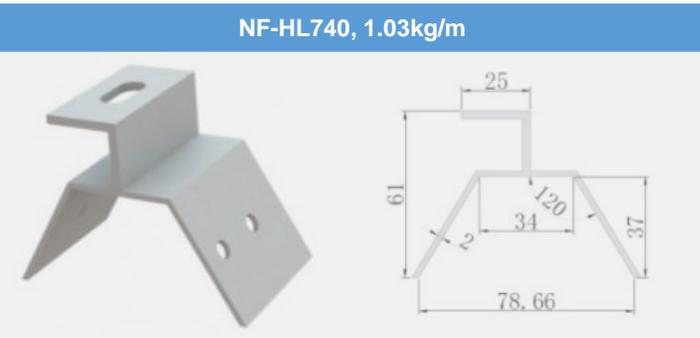


Technical drawing dimensions: 25, 61, 120, 34, 37, 78.66, 2

NF-HL076, 1.97kg/m

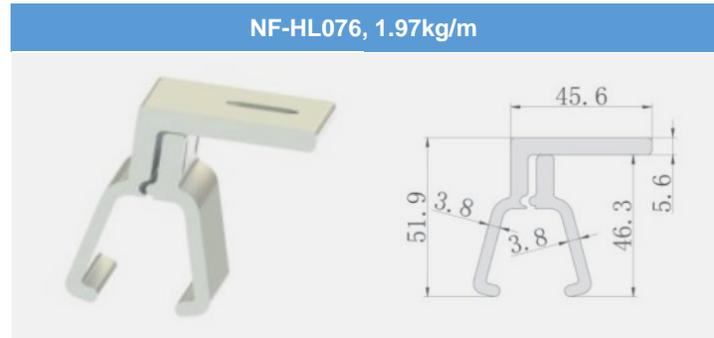

Technical drawing dimensions: 45.6, 51.9, 3.8, 3.8, 46.3, 5.6

NF-HL271, 1.71kg/m

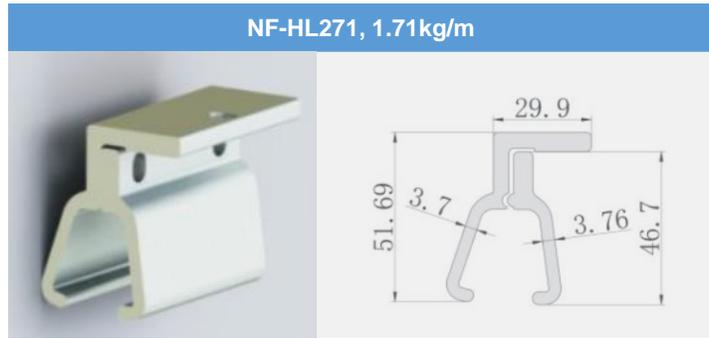


Technical drawing dimensions: 29.9, 51.69, 3.7, 3.76, 46.7

NF-SYM8, 0.05kg/PCS




NF-ZJ312, 3.31kg/m

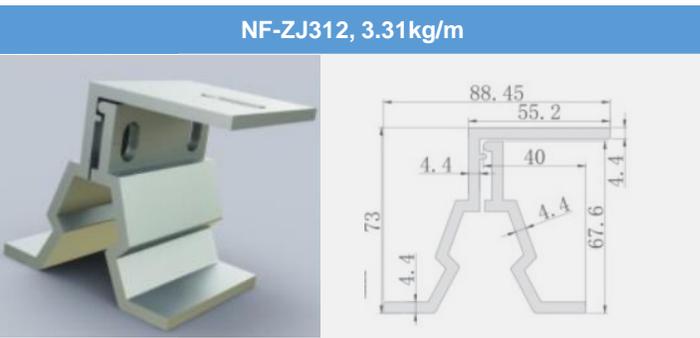


Technical drawing dimensions: 88.45, 55.2, 4.4, 4.4, 4.4, 4.4, 40, 67.6, 4.4

NF-SUS01, 0.2kg/PCS

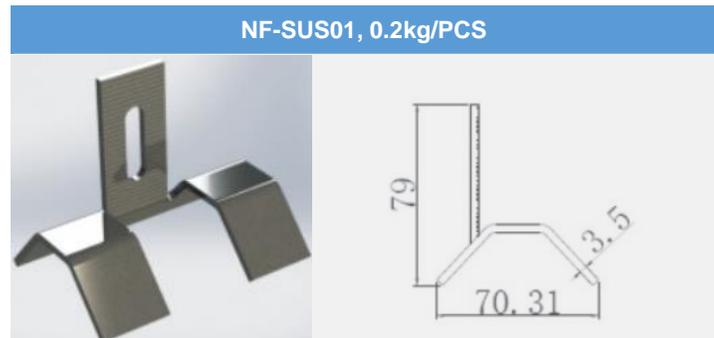


Technical drawing dimensions: 79, 70.31, 3.5

NF-SUS02, 0.5kg/PCS

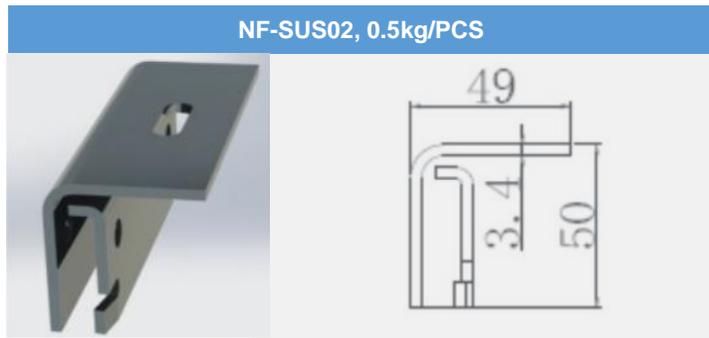


Technical drawing dimensions: 49, 3.4, 50

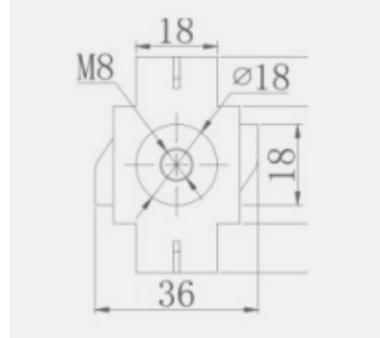


Technical drawing dimensions: 18, 18, 18, 36, M8, $\varnothing 18$

NF-SUS03, 0.3kg/PCS

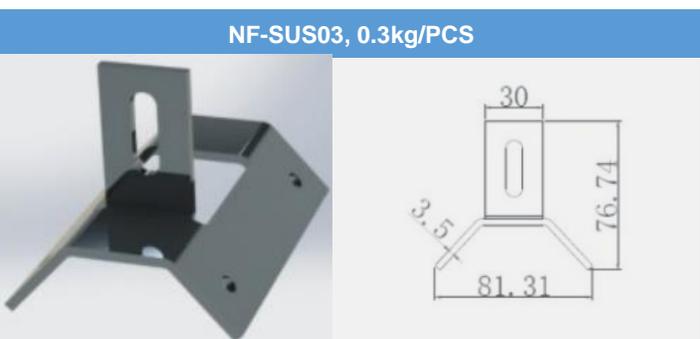


Technical drawing dimensions: 30, 76.74, 81.31, 3.5

NF-SYM10, 0.04kg/PCS

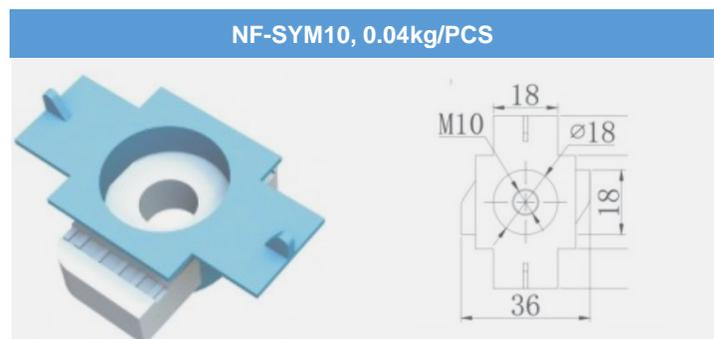

Technical drawing dimensions: 18, 18, 18, 36, M10, $\varnothing 18$

NF-SYM8, 0.04kg/PCS

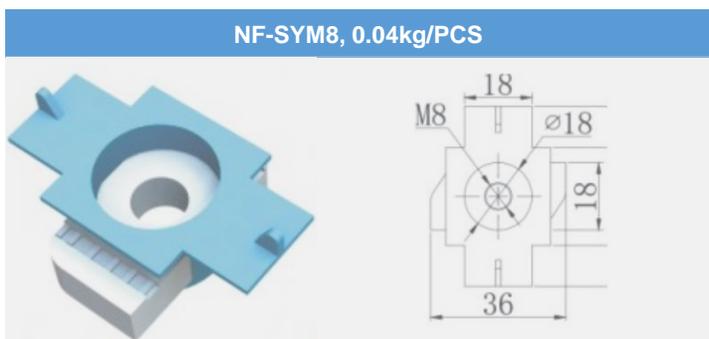

Technical drawing dimensions: 18, 18, 18, 36, M8, $\varnothing 18$

Stainless Steel
SUS304



SINCE 1994

03 Typical Projects

科技引领 创新驱动
面向未来

Over 200MW Generated & 900+ Projects Installed



Typical Projects



Over 200MW Generated & 900+ Projects Installed



Typical Projects





SINCE 1994

04 NCNF Keyword

科技 砥砺前行
聚力 未来

28 *years experience*

150,000m² *Production Bases*

10 *years warranty*

25 *years lifetime service*

Top 10

Manufacturer for Solar Mounting Structure

Feedbacks **<8h**

Service **>60**

Countries


Who is NCNF

Since 1994

WHAT SUPPORT WILL YOU GET



Team Cooperation



Completed
Marketing Material



Tailor-made
Solution



Events



Certificates



Training



SINCE 1994

THANKS

for your time

Factory Add: No.1888, ChangdongIndustrial Park, Nanchang, Jiangxi, China.

Mobile/WhatsApp/WeChat: +86-17854263269

Fax: 0086-0791-88388030

E-mail: connie@ncnffh.com

Website: <http://en.ncnffh.com/> ,

Alibaba: <http://ncnf.en.alibaba.com/>

Made in China: <https://ncnfsolar.en.made-in-china.com/>